

Multifunction Buttons Turn ON/OFF Steps

1. Make sure the matrix and control PC is well connected by LAN cable(this instruction step is using LAN 1: 192.168.0.80)

Please login

admin

Login

© 2018 Company, Inc. V1.2.0

Back to top

2. After logo in, copy and input this link 192.168.0.80/factory.php to the WEB browser, type 1 to turn on the multifunction buttons, will need to use the master **User name(whatcanido4u)**, and **Password(ineedfactory)** to logo in and set up(we usually don't tell this master user name and password to end users, in case of the incorrect operations)

出厂设置

语言设置: en zh: 中文; en: 英文

接口数量: 18 最大160

场景数量: 40 最大40

串口速率: 115200 最大115200

显示设置: 1 -1为7寸屏; 0为10寸屏; 1为液晶+按键; 2为液晶+按键; 只切换不设置

多功能按钮: 1 1: 显示多功能按钮; 0: 不显示多功能按钮


确认

Step 2: click to confirm

© 2018 Company, Inc. V1.2.0

Back to top


3. Need to Logo in the the WEB GUI again by 192.168.0.80

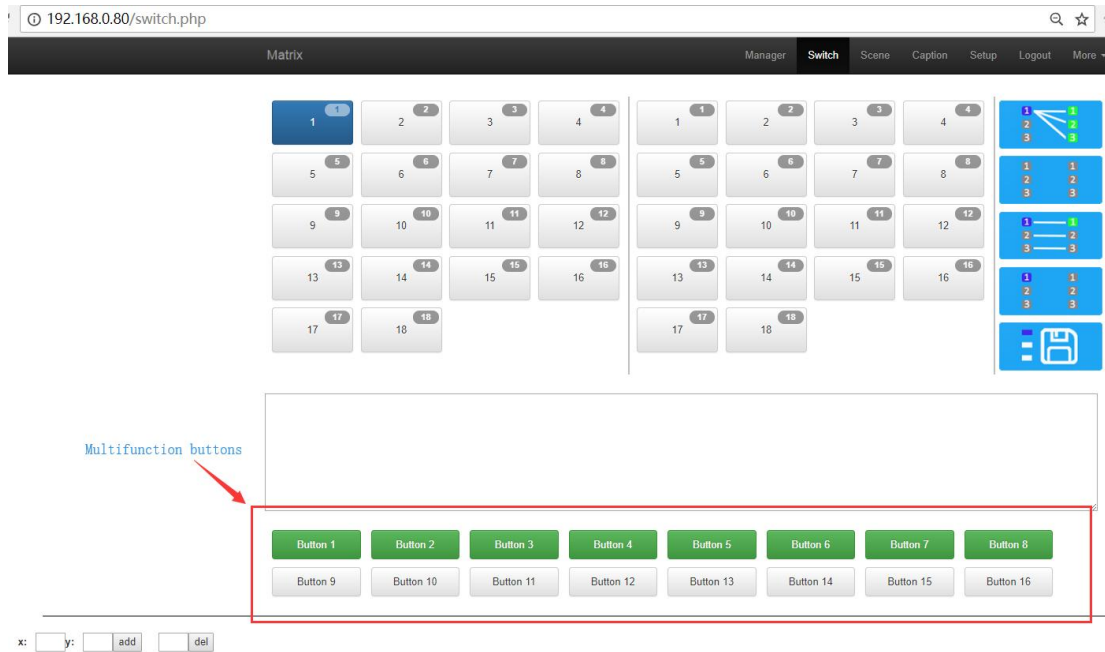

4. For turning OFF this multifunction buttons, first to log in, then copy and input this link 192.168.0.80/factory.php to the WEB browser, type 0 to turn OFF the multifunction buttons



Logo in again will see that the multifunction buttons is NOT showing.

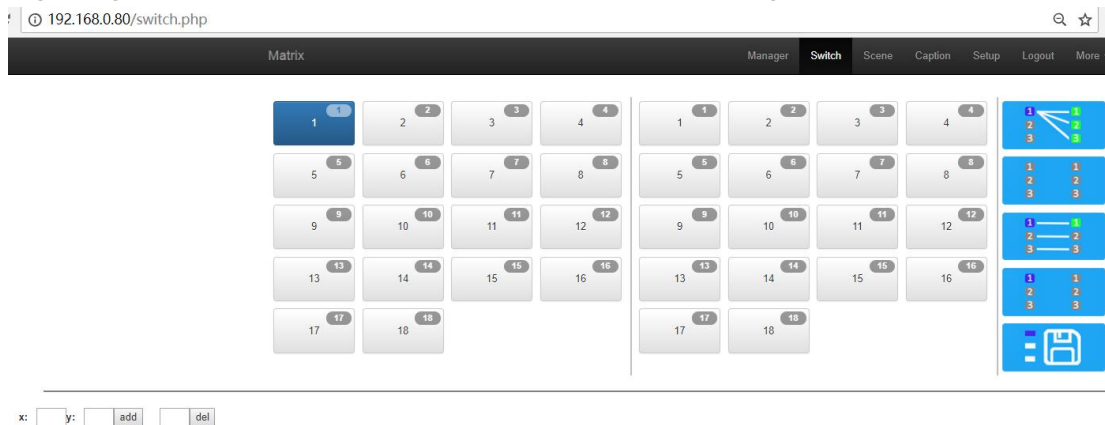

For the Multifunction buttons Setup

1. After Logo in, click “Setup” on the top and scroll down will find the multifunction buttons setup form.

← → ↻ Not secure | 192.168.0.80/setup.php

Matrix Manager Switch Scene Caption **Setup** Logout More

System

System will reboot

Close Reboot

Ethernet

IP 1 192.168.0.80

Subnet 1 255.255.255.0

Gateway 1 192.168.0.1

IP 2 192.168.1.80

Subnet 2 255.255.255.0

Gateway 2 192.168.1.1

Close Default Reload Save

Administrator

Username: admin

Password:

Password: Confirm

Close Default Save

Username: admin

Password:

Password: Confirm

Close Default Save

Multifunction Buttons

01: Button 1	A53E7B01AAAAAA0102AAAAF0	1 2 9600
02: Button 2		1 2 9600
03: Button 3		1 2 9600
04: Button 4		1 2 9600
05: Button 5		1 2 9600
06: Button 6		1 2 9600
07: Button 7		1 2 9600
08: Button 8		1 2 9600
09: Button 9		1 2 9600
10: Button 10		1 2 9600
11: Button 11		1 2 9600
12: Button 12		1 2 9600
13: Button 13		1 2 9600
14: Button 14		1 2 9600
15: Button 15		1 2 9600
16: Button 16		1 2 9600

Close Default Reload Save

2. For multifunction buttons set up, total we have 16 multifunction buttons at present. We can rename the buttons, Type the HEX code for each button, and baud rate select. Then click “Save”.

Rename the buttons here

Multifunction Buttons

01: Switching	A53E7B01AAAAA0102AAAF0	<input type="radio"/> 1 <input type="radio"/> 2 115200
02: Projector OFF		<input type="radio"/> 1 <input type="radio"/> 2 115200
03: Curtain Down		<input type="radio"/> 1 <input type="radio"/> 2 9600
04: Beep OFF	426565704f46462e	<input type="radio"/> 1 <input type="radio"/> 2 9600
05: Button 5		<input type="radio"/> 1 <input type="radio"/> 2 9600
06: Button 6		<input type="radio"/> 1 <input type="radio"/> 2 9600
07: Button 7		<input type="radio"/> 1 <input type="radio"/> 2 9600
08: Button 8		<input type="radio"/> 1 <input type="radio"/> 2 9600
09: Button 9		<input type="radio"/> 1 <input type="radio"/> 2 9600
10: Button 10		<input type="radio"/> 1 <input type="radio"/> 2 9600
11: Button 11		<input type="radio"/> 1 <input type="radio"/> 2 9600
12: Button 12		<input type="radio"/> 1 <input type="radio"/> 2 9600
13: Button 13		<input type="radio"/> 1 <input type="radio"/> 2 9600
14: Button 14		<input type="radio"/> 1 <input type="radio"/> 2 9600
15: Button 15		<input type="radio"/> 1 <input type="radio"/> 2 9600
16: Button 16		<input type="radio"/> 1 <input type="radio"/> 2 9600

Close Default Reload Save

COM port select and baud rate input

Type the HEX Code here

Click to save settings

Matrix Manager **Switch** Scene Caption Setup Logout More

1	2	3	4	1	2	3	4	1	2	3
5	6	7	8	5	6	7	8	1	2	3
9	10	11	12	9	10	11	12	1	2	3
13	14	15	16	13	14	15	16	1	2	3
17	18			17	18			1	2	3

2018-08-07 11:43:29 > send 1,9600,426565704f46462e
2018-08-07 11:43:29 > load 4

Switching	Projector OFF	Curtain Down	Beep OFF	Button 5	Button 6	Button 7	Button 8
Button 9	Button 10	Button 11	Button 12	Button 13	Button 14	Button 15	Button 16