

U S E R M A N U A L

Multi-media Switcher

Model No:HDCRGB0201

Enjoy the vivid world !

INTRODUCTION

Dear customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Our series of HDMI converters,switchers, extenders, matrixes and splitters are designed to make your A/V device use more convenient ,more comfortable, more productive and more cost-efficient.

The **HDCRGB0201 switcher** use single source with VGA port or single source with YPbPr component accessing to single sink with HDMI port. The switcher allows RGB signal to be converted easily to TMDS signal .

Our devices offers solutions for noise, space and security concerns, data center control, information distribution, conference room presentation, school and corporate training environments.


FEATURES

- I One YPbPr input.
- I One VGA input.
- I R/L analog audio input.(can't be used with stereo Mini-Jack audio at the same time).
- I 3.5mm Stereo Mini-Jack audio input.(can't be used with R/L audio input at the same time).
- I One HDMI signal output.
- I Support input up to 1080P via component.
- I Support VGA input : VGA@60, VGA@75, XGA@60HZ, XGA@75, SXGA@60HZ, SXGA@75HZ, SVGA@60, SVGA@75, 1280X768@60.
- I HDMI output resolution:720P/ 60Hz.
- I Adaptive PAL / NTSC standard.
- I LED indication : when source or sink is working, LED relative to is light.
- I Inputs can be switched with the IR remote control, also can be controlled by button.
- I Installs in minutes
- I Need DC5V/2A power supply


The accessories with the machines lists as picture:

- 1、5V Power Adaptor
- 2、Remote
- 3、one pc of Manual

Power Adaptor

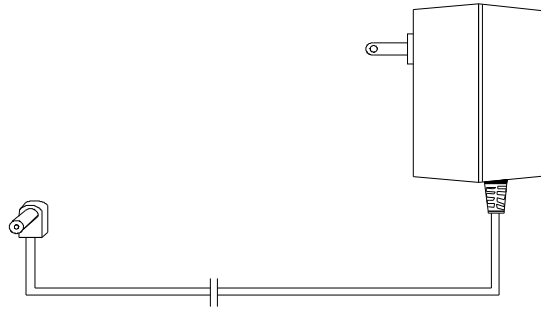

Remote

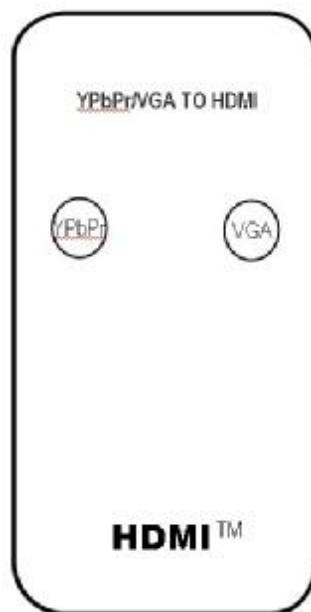

Physical Connection Showing Picture:

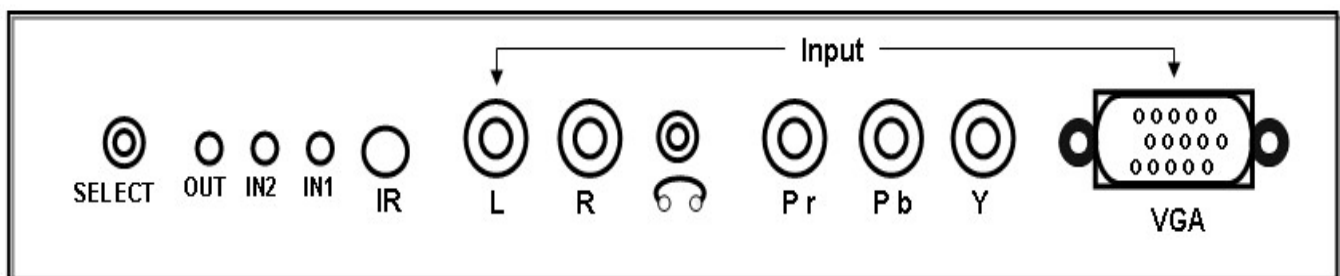


Figure 1.0 Front Panel Showing Picture

SELECT : Signal Input Switch Button


OUT : Signal Output Led Status Light

IN2: Ypbpr input led status light

IN1: VGA input led status light

IR: IR Receiver

R/L: Analog Sound Track(L/R) input interface

: 3.5 Audio input interface

Y Pb Pr: Ypbpr input interface

VGA: VGA input interface

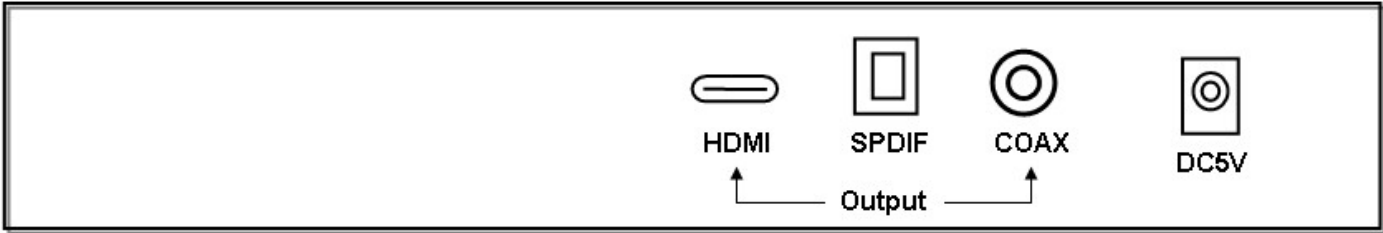


Figure 1.1 rear panel showing picture

HDMI : HDMI output interface

SPDIF: SPDIF output interface

COAX: SPDIF coax output interface

DC 5V: 5V DC-DC interface

Operating and Connecting:

1. Connect VGA cable from source devices with VGA port into the switcher’s input.
2. Connect component calbe from source devices with RCA port into the switcher’s input.
3. Connect HDMI calbe from sink device with HDMI input port into switcher’s output.
4. Connect 5V power supply to the HDCRGB0201 switcher.

SPECIFICATIONS:

HDCRGB0201

Support input.....CVBS and AV

Support VGA output800×600@60HZ , 1024×768@60HZ ,
1280×1024@60HZ

Support resolution up to.....1250lines

Max refresh rate.....75HZ

Input Video signal	0.5~2.0Volts p-p
Output video signal.....	-0.35~0.7Volts p-p
Max working current.....	800mA
Power adapter format.....	Input:AC (50HZ, 60HZ) 100V-240V; Output: DC5V/2A
Operating Temperature range.....	(-15 to +55℃)
Operating Humidity range.....	5 to 90%RH (No Condensation)
Dimension (L x W x H)	178x65x27 (mm)
Weight.....	390g

IR Remote Operating Instruction

1. Firstly take off the plastic film in the rear of the remote board.
2. If you want to select any of the two signal sources to the output, press the YPbPr or VGA key .Like if you want to switch the VGA input signal to the output, press the VGA key directly.
3. The plastic film is strongly advised to put it in the rear of the remote board when the remote is not used for long time.

Notes:

Pls use the machine as the instruction listed to keep the long use lifetime of the machine.

1. The machine should be placed at the spot far from the Damp, High-Temperature, Dusty, Erosive, and oxidative environment.
2. All parts will be free from the strong shake, hit, fall.
3. Touching the power adaptor with the wet hands is prohibited.
4. Pls hold the power adaptor head and do not pull the power cord when cut off from the socket.
5. Pls turn the power off when the machines is not used for long time.
6. Pls do not open the cover and do not touch the inside parts.
7. Pls use the original factory power adptor.

Before power on, pls check the connection line carefully. And make sure that all interfaces are normally connected. The common trouble shooting way shows below:

Serial NO	Trouble Description	Cause and Ways to deal with
1	Non-Power-Connencted	1、 Check if the power adaptor head is truly and correctly inserted the power socket. 2、 Check the power switch if it is in on status.
2	No Picture	1、 Pls to make sure that the TV is on and has been connected with the machine,. 2、 To check if the signal source is on and well connected. 3、 Check the system connection quality. 4、 Check if the line is all good quality. 5、 Check the cable quality(to see if the cable is compliant with the HDMI V 1.3..
3	Obscure Picture	1、 To try again to connect the cable to be free from the unsuccessful connection. 2、 HDMI Cable Quality(HDMI Cable is compliant with the HDMI V1.3)
4	Remote	1、 Pls check if the film that stops the current has been taken out. 2、 To check if the remote battery is working full.