

Video Extender Rack Mount Kit

VE-RMK1U

The VE-RMK1U kit provides a mounting frame and accessories to install up to 4 ATEN Video Extenders in 1U of rack space.


User Instructions

Package Contents:

- 1 VE-RMK1U Frame
- 4 1U Mounting Plates
- 5 Plastic Captive Screws
- 6 Hexagon Head Screws
- 12 Countersunk Head Screws

Installation:


1. Position the VE-RMK1U Frame on the front of the rack and align the holes in the mounting brackets with the holes in the rack, then screw the mounting brackets to the rack. Rack screws are not provided.

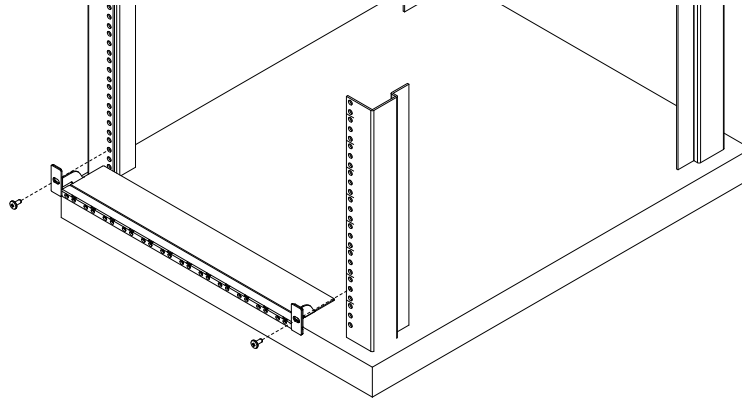


2. Find the letter for your ATEN Video Extender in the table. Aligning the front of the video extender with the letter on the mounting plate will position the holes needed to screw the video extender to the mounting plate. The table's top row shows how many units can be installed in one VE-RMK1U Frame.

4 Units		3 Units		2 Units	
A	B	C		C	
CE100	VB802	CE250A	UC4854	CE350	CE750
VE560	VE150A	CE700A	VE802	CE370	CE750A
VE600A	VE170	CS72D	VE812	CE600	CE770
VE601	VE172R	CS72E	VE814	CE602	CN8000A
VE602		UC2322	VE882	CE604	CE800B
VE800A		UC2324	VE892	CE610A	CN8000
VE801		UC4852	VS182A	CE624	CS74D
VE803		VE1812	VS192	VE1832	VS481A
VE810		VE2812T	VS194	CS724KM	VS481B
VE901		VE8900	VE814A	VE883	CS74E
VE811		VE8950		VE816R	VC880
		VS182B		VS481C	
		KE6900ST		VS184B	

Mounting Plate

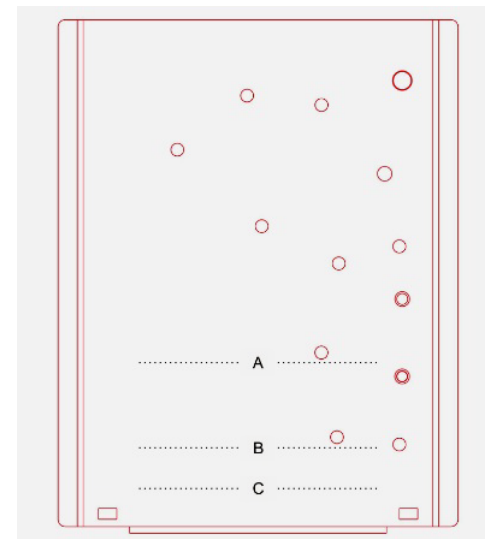




Mounting Positions on Frame

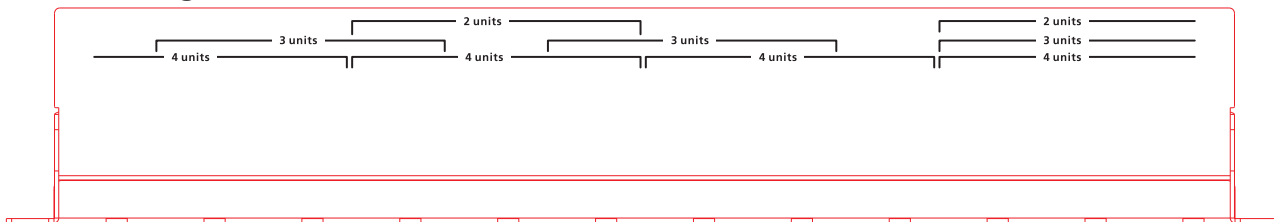

Video Extender Rack Mount Kit VE-RMK1U

User Instructions

3. Align the front of the video extender with the appropriate letter on the 1U Mounting Plate (see step 2), and then screw the video extender to the mounting plate. Two examples are provided.

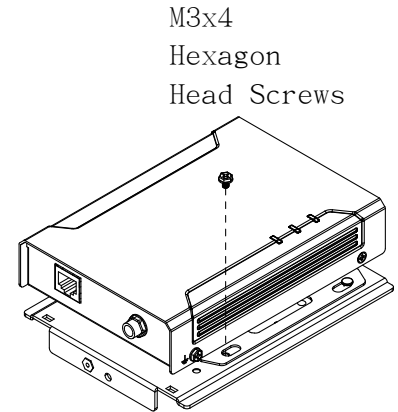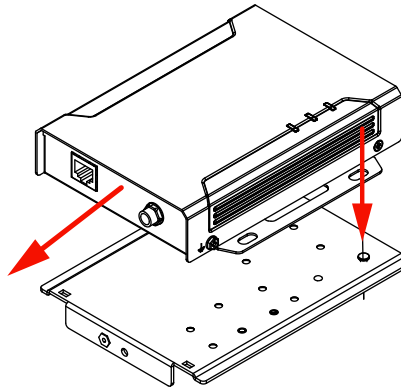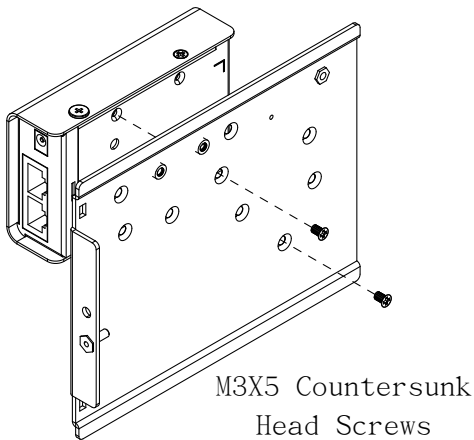

4. Slide a 1U Mounting Plate with video extender attached onto a slot in the VE-RMK1U Frame, aligning the screw hole and fitting the notch. Secure the mounting plate to the frame with a Plastic Captive Screw. Repeat the process with each video extender.

