

Dante® Compatibility

The Just Add Power 3G+ Dante® Sound System Transmitter adds compatibility with Dante® and AES67 audio networks to the UltraHD over IP system.

Input up to 8 channels into the Dante® network.

Extract up to 8 channels from the Dante® network, embed onto the HD over IP signal, and distribute across the Just Add Power network.

Mix-and-match! The 3G+ Dante® Sound System Transmitter is fully compatible with all 2GΩ/3G and 3G devices.

Not just for Dante®. AES67 compatibility for interoperability with other leading audio-over-IP technologies



Features	
Ultra HD & 4K video with HDCP 2.2	
Input LPCM audio up to 8 channels	
Dante® audio send and receive up to 8 channels	
Inject Dante® audio into the J+P network	
AES67 Compatibility Mode	
HDMI pass-through	
Control endpoints with RS232 & IR*	

Compliance	HDCP 2.2 & RoHS/FCC/CE
Supported Video & Audio	Up to 4096x2160 8-channel LPCM
Encryption	Hardware-Based AES 256-bit Encryption of Network Video Signal
Ports	J+P Gigabit Ethernet HDMI In HDMI Out 3.5mm RS232 w/ null modem Dante Gigabit Ethernet
Dimensions & Weight	184x30x152mm/7.2x1.2x6.0 inch 0.54 kg / 1.2 lb
Operating Temp	0-60 °C / 32-140 °F
Bandwidth	180-850 Mbps
Power Supply (not included)	~4.7 – 23V 5.5mm/2.1mm, Positive tip
PoE	10 watts maximum



J+P NETWORK


HDMI IN

HDMI OUT


RS232

DANTE NETWORK

All measurements in millimeters (mm)

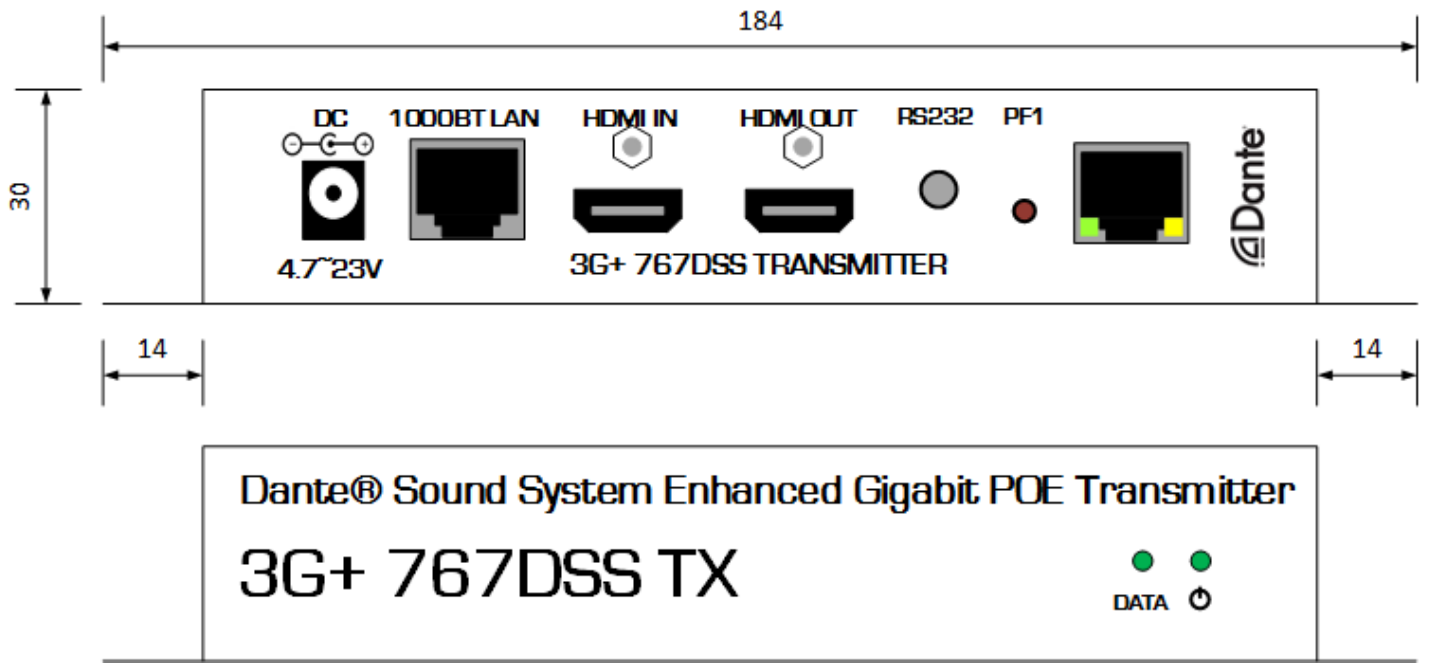

767DSS Front/Back

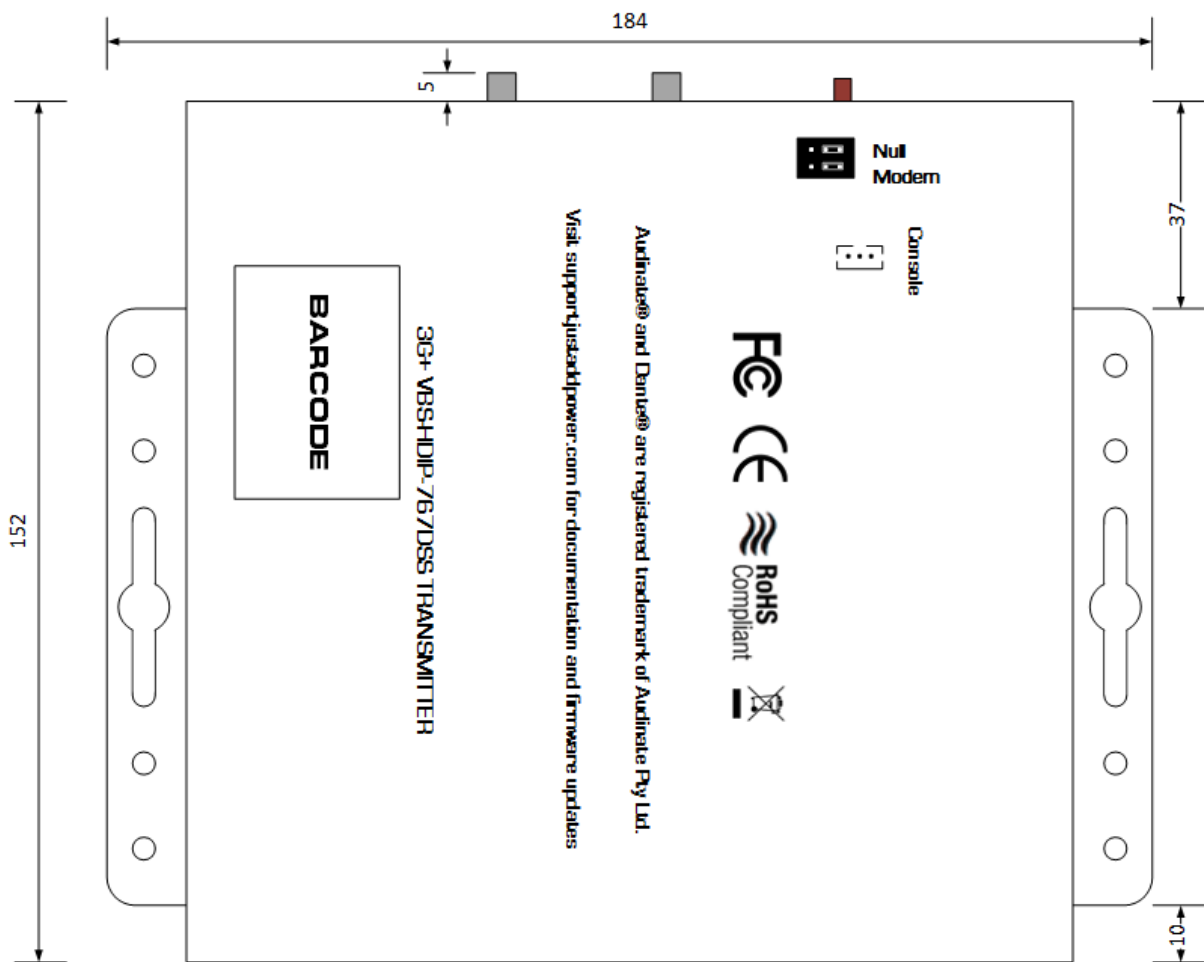

767DSS Bottom