

# HDMI Over Cat 5 Extender Wall Plate

## VE806

- The VE806 HDMI Over Cat 5 Extender Wall Plate extends HDMI and audio signals up to 60m using Cat 5e cable. It supports popular widescreen formats and ensures excellent video quality over long distance transmissions.

The VE806 can be powered at either the Transmitter or Receiver side, and uses a second Cat 5e cable to transmit the power signal. The VE806's compact wall plate design does away with bulky cables and allows a neat and convenient installation. It is an ideal solution for function rooms, museums and any environment that requires equipment or cabling to be kept hidden from public view.





### Features

- Uses two Cat 5e cables to connect the local and remote units – one to transmit video and audio, and another for power\*
- Remotely powered from either the Transmitter or Receiver side\*\*
- Extends the distance between HDMI source and HDMI display
- Superior video quality – up to 1080p @ 60 Hz (40m), 1080i @ 60 Hz (60m)
- HDMI (3D, Deep Color); HDCP-compatible
- 8 segment equalization adjustment switch optimizes display quality
- Supports widescreen formats
- Supports hot plugging
- Decora design is easily configurable to fit various wall plates
- LED indication of power sources / connection status
- Supports stereo audio
- Built-in 8KV/15KV ESD protection
- Easy installation
- Wall mountable for a neat installation
- Plug-and-play – no software installation required

#### Note:

\*The second Cat 5e cable connection is required to remotely power on either the Transmitter or Receiver.

\*\*A power adapter is provided with this package, and can be used at either the Transmitter or Receiver side, which in turn remotely powers the other unit.

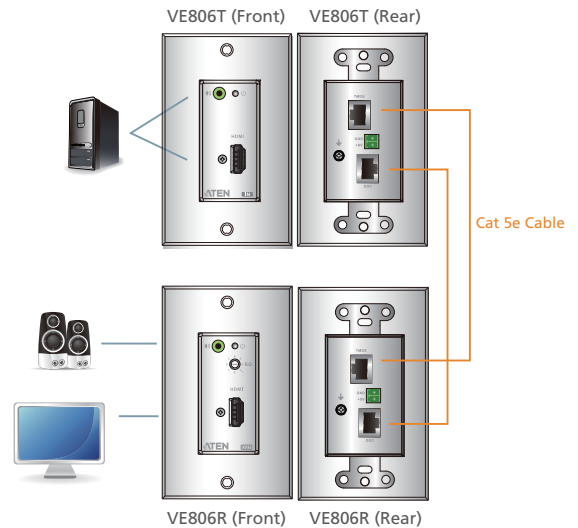

### Specifications

Function	VE806R	VE806T
<b>Video Input</b>		
Interfaces	N/A	1 x HDMI Type A Female (Black)
Impedance	N/A	100
Max. Distance	N/A	1.8 m
<b>Video Output</b>		
Interfaces	1 x HDMI Type A Female (Black)	N/A
Impedance	100	N/A
<b>Video</b>		
Max. Data Rate	6.75 Gbps (2.25 Gbps per Lane)	
Max. Pixel Clock	225 MHz	
Compliance	HDMI (3D, Deep Color); HDCP-compatible	
Max. Resolutions / Distance	Up to 1080p @ 40 m; 1080i @ 60 m	
<b>Audio</b>		
Input	N/A	1 x HDMI Type A Female (Black)
Output	1 x HDMI Type A Female (Black)	N/A
<b>Power</b>		
Consumption	9 VDC, 2.9 W	
Connectors	1 x Terminal Block (Green)	
<b>Environmental</b>		
Operating Temperature	0° to 50° C	
Storage Temperature	-20° to 60° C	
Humidity	0 - 80% RH, Non-condensing	
<b>Physical Properties</b>		
Housing	Metal	
Weight	0.17 kg	0.17 kg
Dimensions (L x W x H)	10.41 x 4.44 x 4.00 cm	10.41 x 4.44 x 4.00 cm

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Publish Date: 09/2016 V3.0



© Copyright 2016 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.