




## 18Gbps 4x4 HDBaseT/HDMI Matrix Switch AC-MX-44HDBT

The AC-MX-44HDBT is a 4x4 HDMI/HDBaseT matrix switch. This unit includes 4 HDMI inputs and 4 HDMI/HDBaseT output blocks. These output blocks have an HDBaseT and HDMI port; these ports are mirrored and are both active. This matrix supports HDMI 2.0(a/b), HDCP 2.3, up to 4K video resolution, and up to 18Gbps bandwidth. We can pass 18Gbps through category cable using our proprietary HDBaseT technology, ICT. This matrix supports complete EDID management, allowing maximum flexibility with today's broad range of sources and displays. The AC-MX-44HDBT also features the AVPro Edge User Interface (AEUI). We built the AEUI from scratch for our integrators with the technology they requested.

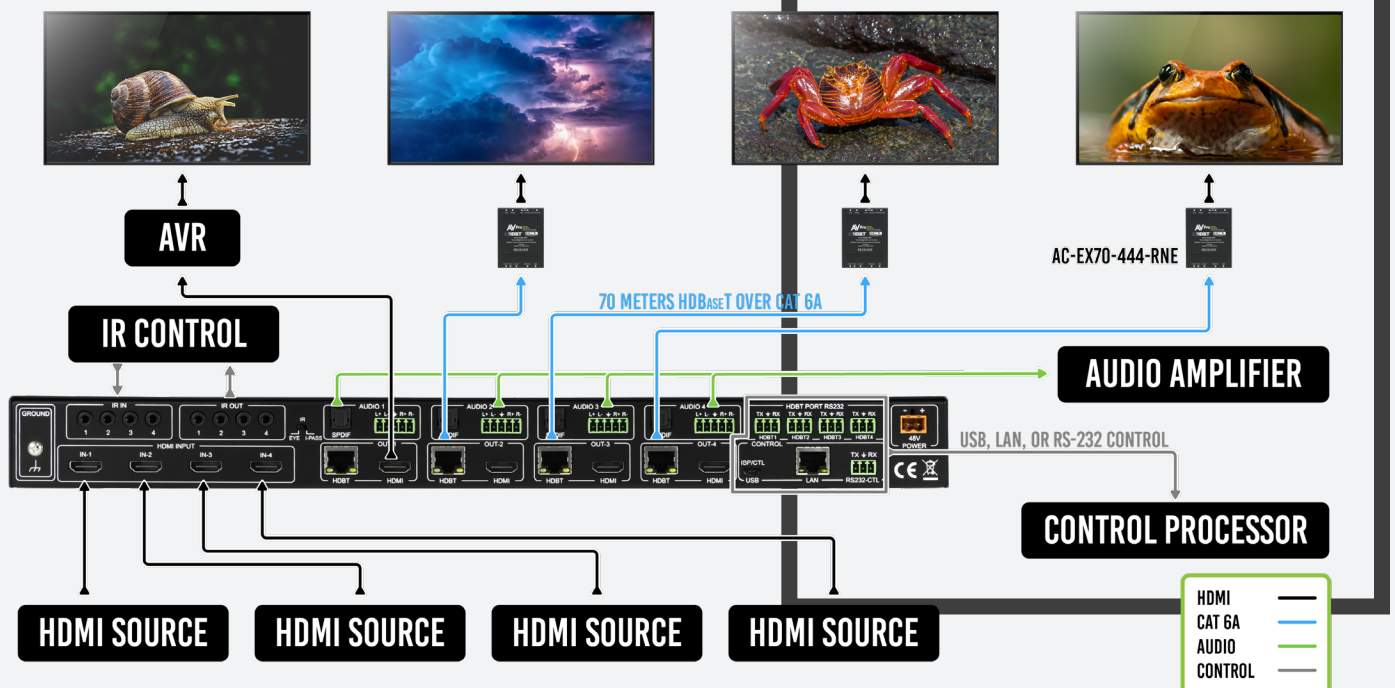

PRODUCT SPECIFICATIONS

VIDEO:	
VIDEO RESOLUTIONS	UP TO 4K 60HZ 4:4:4
VESA RESOLUTIONS	UP TO DCI 4K (4096X2160)
HDR FORMATS/RESOLUTIONS	420, 422, 444 (10 AND 12 DEEP COLOR) HDR10, HDR10+, DOLBY VISION, HLG
COLOR SPACE	YUV (COMPONENT), RGB (CSC: REC. 601, REC. 709, BT2020, DCI, P3 D6500)
CHROMA SUBSAMPLING	4:4:4, 4:2:2, 4:2:0 SUPPORTED
DEEP COLOR	UP TO 16 BIT (1080), UP TO 12 BIT (4K)
SCALERS (HDMI) PER OUTPUT OPTIONAL	1080P TO 4K (RESOLUTIONS ONLY, FRAMRATE STAYS THE SAME)
SCALERS (HDBASET) PER OUTPUT OPTIONAL	4K TO 1080P (RESOLUTIONS ONLY, FRAMRATE STAYS THE SAME)
AUDIO:	
AUDIO FORMATS SUPPORTED HDMI	PCM 2.0 CH, LPCM 5.1 & 7.1, DOLBY DIGITAL, DTS 5.1, DOLBY DIGITAL PLUS, DOLBY TRUEHD, DTS-HD MASTER AUDIO, DTS-X, DOLBY ATMOS
AUDIO FORMATS SUPPORTED EXTRACTED (TOSLINK)	PCM 2.0 CH, LPCM 6 CH, LPCM 7 CH, DOLBY DIGITAL, DOLBY DIGITAL PLUS, DTS- MASTER AUDIO
AUDIO FORMATS SUPPORTED EXTRACTED (2CH PORT)	PCM 2 CH (NO DOWNMIX)
AUDIO EXTRACTION LOCATION	BIND TO INPUT, BIND TO OUTPUT, OR MATRIX (INDEPENDENT)
AUDIO DELAY (PER OUTPUT, EXTRACTED)	UP TO 630MS
DISTANCE:	
HDBASET OUT (4K60 4:4:4 & HDR) W/AC-EX70-444-RNE	70 METERS / 230 FEET (CAT 6A)
HDBASET OUT (1080P) W/AC-EX70-444-RNE	100 METERS / 330 FEET (CAT 6A)
HDBASET OUT (4K60 4:2:0 MAX) W/AC-EX70-UHD-R	40 METERS / 131 FEET (CAT 6A)
HDBASET OUT (1080P) W/AC-EX70-UHD-R	70 METERS / 230 FEET (CAT 6A)
HDMI IN/OUT (4K60 4:4:4)	UP TO 50 FEET (USING BULLET TRAIN HDMI)
HDMI IN/OUT (W/ AOC CABLE) (4K60 4:4:4)	UP TO 130 FEET (USING BULLET TRAIN AOC)
OTHER:	
BANDWIDTH HDMI	18 GBPS UNCOMPRESSED
BANDWIDTH HDBASET	18 GBPS (USES ICT ABOVE 10.2 GBPS SIGNALS)
HDCP	HDCP 2.3 AND EARLIER
POH FOR RECEIVERS (NO NEED TO POWER RECEIVERS)	YES, ALL OUTPUTS
CONTROL:	
PORTS	LAN, RS232, IR
DRIVERS	C4, RTI, ELAN, CRESTRON, URC (SEE DRIVERS PAGE ON AVPROEDGE.COM/DRIVERS)
PC SOFTWARE	YES
LAN WEB OS	YES
PORTS:	
HDMI	TYPE A
HDBASET	RJ45 W/ POH FOR HDBASET RECEIVERS
LAN	RJ45 W/ WEB INTERFACE/ CONTROL
AUDIO (EXTRACTED DIGITAL)	TOSLINK
AUDIO (EXTRACTED ANALOG)	5 PIN TERMINAL BLOCK (BALANCED)
IR RX	3.5MM STEREO (3 CONDUCTOR)
RS232	3 PIN TERMINAL BLOCK
ENVIRONMENTAL:	
OPERATING TEMPERATURE	23 TO 125°F (-5 TO 51°C)
STORAGE TEMPERATURE	-4 TO 140°F (-20 TO 60°C)
HUMIDITY RANGE	5-90% RH (NO CONDENSATION)
POWER:	
POWER CONSUMPTION (TOTAL)	38 WATTS MAX
POWER SUPPLY - MATRIX	INPUT: AC 100-240V ~ 50/60HZ OUTPUT: DC 48V 1.5A
DIMENSIONS:	
DIMENSIONS (UNIT ONLY - HEIGHT/DEPTH/WIDTH)	MM: 50.8 X 256 X 441.33 INCH: 2 X 10.07 X 17.375
DIMENSIONS (PACKAGED HEIGHT/DEPTH/WIDTH)	MM: 88.9 X 393.7 X 495.3 INCH: 3.5 X 15.5 X 19.5
RACK UNITS	1 UNIT
WEIGHT (UNIT)	7.5 LBS (3.4 KG)
WEIGHT (PACKAGED)	10 LBS (4.54 KG)
*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. MASS & DIMENSIONS ARE APPROXIMATE	

Our best developers have been hard at work bringing our integrators an easy-to-use web based user interface that allows them to set up, troubleshoot, and control this switch. The AVPro Edge user interface (AEUI) allows for easy configuration and sets up the matrix. This 8K matrix switcher also comes with a screen on the unit that can tell you the IP address for connecting directly to your control system. From built-in scaling to complete EDID control and configuring, you can customize every aspect of this device to work perfectly for your system.

FULL FEATURE SET

- HDMI 2.0(a/b)
- 18Gbps Uncompressed Bandwidth Support on HDMI
- 18Gbps with ICT on HDBaseT outputs
- 4K60 4:4:4 Support
- Full HDR Support (HDR 10 & 12 Bit)
- Dolby Vision, HDR10+ and HLG Support
- HDCP 2.2 (and all earlier versions supported)
- 1080p > 4K Upscaling on HDMI outputs
- 4K > 1080P Downscaling on HDBaseT outputs
- Advanced EDID Management
- IR, RS-232 and LAN Control Options
- Digital Toslink Out (7CH PCM, DD, DTS)
- Balanced Analog Out (2CH PCM)
- Audio Delay for Digital & Analog Out
- HDBaseT Compatibility mode for mixed systems
- Driver Support for Crestron, C4, RTI, ELAN and more
- Extracted Audio Now Supports DD+, DTS Master Audio on Toslink
- Extracted Audio Now Has 3 Operating Modes. Bound to Input, Bound to Output, or Independent Matrix
- Built-in Test Pattern on Each Output to Verify Infrastructure

