


DP-VGA-HDBaseT-Wallplate

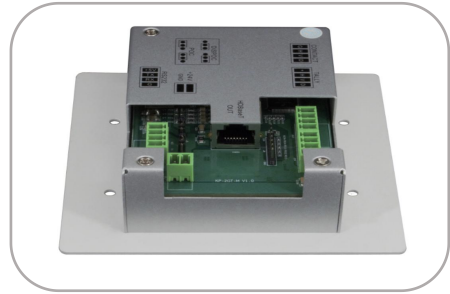


HDBT-WALL-DHDV-70T is an HDBaseT Wallplate transmitter, it can support 1*DP, 1*HDMI and 1*VGA+3.5mm audio inputs, 1*HDBaseT(RJ45) output. It also supports the input sources switching by the one-key button, RS232 and touch switcher. Users also can use the online control by the software on PC via RS232 with the RS232 control commands. The resolution can up to 4k@30hz, with the POC(power over cable) function, users can only power on the HDBaseT receiver. It also supports bi-directional RS232. For the transmission distance it can up to 70m at 1080P, and for 4K30Hz it can up to 35m. It's popularly used in the small meeting room, classroom or other long distance transmission applications.

Features

- ☛ Supports 1080P 3D, and up to 4K30
- ☛ Supports HDCP1.4
- ☛ Transmission distance: 70m at 1080P, 35m at 4K30 via Cat5e/Cat6
- ☛ Supports bi-directional RS232 transmission
- ☛ Supports POC(power over Cable) function
- ☛ Supports RS232 control with software on PC
- ☛ Support one-key, RS232 and touch switch or auto switching
- ☛ LED working indicator

Diagram

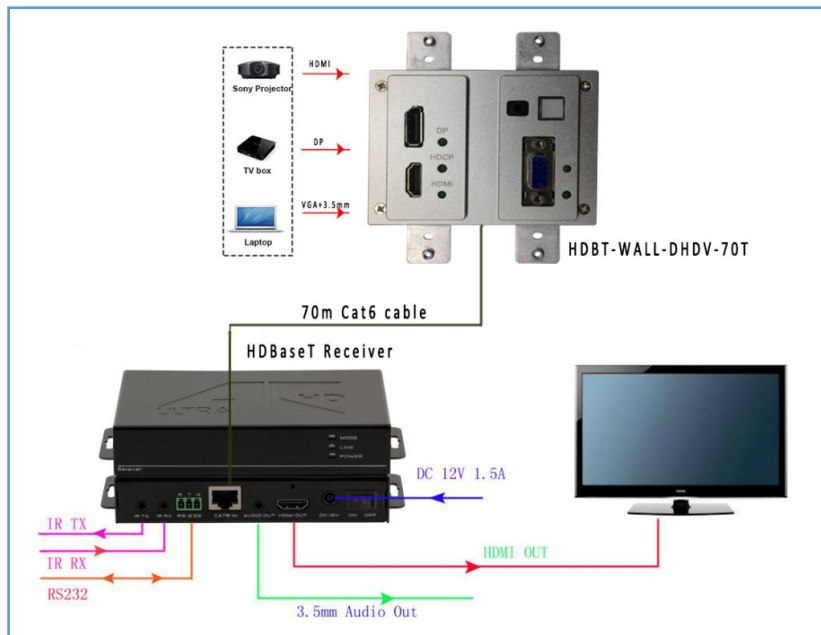

Specifications

Model	HDBT-WALL-DHDV-70T
Product Name	DHDV Wallplate transmitter
Input	1*DP, 1*HDMI, 1*VGA+3.5mm audio
Output	1*HDBaseT(RJ45)
Control	Key button, RS232, touch switch, auto switching
Transmission distance	70m at 1080P, 35m at 4K30 via Cat5e/Cat6
Bandwidth	10.2Gbps
Power Supply	DC 24V 1.25A
Dimension (WxHxD)	115*140*40.2mm
Weight	100g
Operating Temperature	-10℃ to 40℃
Storage Temperature	-25℃ to 55℃