
## • Software update

The scaler switcher supports software updates via USB flash disk. The procedure is as follows:

Copy the file "MERGE.bin" to the root directory of a USB flash disk. (Make sure the file is copied to the root directory. The "MERGE.bin" file is provided/authorized by our engineering department or from our website)
Plug the USB flash disk to the scaler switcher USB port on its rear panel.

3) Press the MENU -->software update-->YES enter to start the update. the OSD will display the update process.

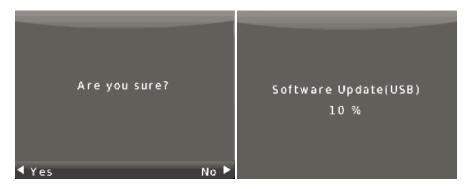

When update completed, Press MENU button to check the software version (the second sec

## Factory Reset

connect the scaler switcher with a computer by RS-232 cable. then open the control software on your computer. The interface of the control software is showed as below:

5x1 Scaler Switcher V1.02	_ ×
General Setup	
COM Port COM3 -	Connect 1
HDMI 1 HDMI 2 HDMI 3	HDMI 4 VGA
	AUTO
OUTPUT	
Resolution 🔹	Set
Aspect Ratio 24:3 216:9	
Reset to the factory settings	Disable/Enable Beep
Factory Reset 2	Enable Beep