



Scan to go to website

WM-6D Quick Start Guide


This guide helps you install and use your WM-6D for the first time.

Go to <http://www.kramerav.com/downloads/WM-6D> to download the latest user manual and check if firmware upgrades are available.

Step 1: Check what's in the box

- ✔ 1 WM-6D 6.5", 2-way wall mounted PoE powered Dante speaker
- ✔ 1 EasyMount mounting bracket
- ✔ 2 bracket screws
- ✔ 1 Silicon cap
- ✔ 1 L-Shaped Allen key (M6)
- 1 Quick start guide

Step 2: Get to know your WM-6D

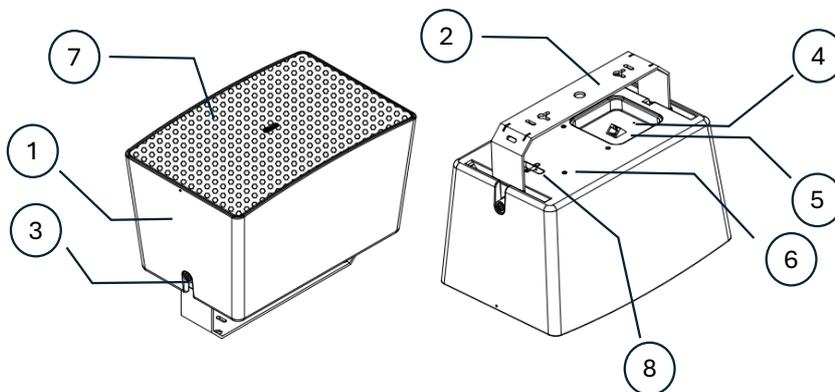

#	Feature	Function
1	Speaker	Speaker body
2	EasyMount Bracket	For mounting the bracket in horizontal or vertical position as well as in corners
3	Mounting bracket screws	For securing the EasyMount bracket to the speaker and adjusting the angle
4	Factory Reset button	For resetting the DSP to default values
5	RJ45 connector	PoE Ethernet connector
6	75mm VESA mounting threads	Standard 75mm VESA mounting threads for alternative mounting options
7	Speaker grill	Speaker's grill
8	Safety anchor point	Secondary safety anchor point for securing a seismic restraint cable

Step 3: Key Features

- Supports PoE++/PoE+/PoE (auto-negotiate)
- Built-in mixer, DSP, and amplifier for two-channel mixing, parametric EQ, High pass and low pass filters, input compressor, output limiter and advanced power settings
- Features a built-in "Find Me" tone, making it easy to identify and locate individual speakers during installation or maintenance.
- Power handling: 10W continuous / 30W peak
- Sound Pressure Level (SPL):
 - Sensitivity (1W@1m, free field): 90dB SPL



- Maximum SPL: Continuous: 100dB SPL / Peak: 105dB SPL
- Regulatory compliance:
 - UL1480A Certified
 - IEC62368(CB) / CE LVD, UL62368-1
 - FCC/IC, BIS, RCM
 - RoHS, REACH, WEEE

Step 4: Achieving the Best Performance

To ensure optimal power delivery, audio performance, and long-term reliability of the Kramer WM-6D PoE-powered Dante speaker, follow these cabling best practices:

Use high-quality Ethernet Cables

For all PoE+ and PoE++ installations, it is essential to use high-quality Ethernet cables that are designed to handle higher power, minimize signal degradation and electro-magnetic interference.

Kramer recommends that CAT cables used for PoE Dante speakers should meet the following criteria:

- Use Category 6A cables or higher
- Use S/FTP or U/FTP shielded cables
- For long cable runs use 23 AWG conductors or thicker
- Use cables rated for 60°C or higher
- Use Low Smoke Halogen free rated (mainly for plenum and in-wall installations)

Kramer recommended cables:

- **PC6A-LS508** - CAT6A S/FTP 500MHz 4x2x26AWG Patch Cord Low Smoke & Halogen Free available from 0.15m to 30m
- **BC-DGKat7a23** - Four-Pair CAT 7a S/FTP Data Bulk Cable (23AWG) – available in 100m and 305m bulks
- **BC-UNIKAT** CAT6A U/FTP Video & LAN Bulk Cable — Low Smoke & Halogen Free

Installation Best Practices

- Cable Length Limit: Keep total cable length between the PoE switch and the speaker under 100 meters
- Avoid Tight Bundling & Coiling
- Route Away from Electrical Noise: Do not run Ethernet cables parallel to power lines or close to lighting dimmers and ballasts
- Ensure Proper Termination & Grounding: Especially for shielded cables (S/FTP or Cat7A), ensure grounding is done correctly at one end

Step 5: Choosing the Best Location


- Plan the location of the speakers based on the designated listening area, the height of the ceiling and dispersion angle of the speakers.
- Wall Type Suitability: Ensure the wall is appropriate for supporting the speaker's weight.
- Obstruction Check: Verify the mounting location is free of obstructions like electrical piping, AC ducts, or water lines.
- Ceiling Clearance: Avoid placing speakers too close to the ceiling to prevent sound distortion.
- Avoid Reflective Surfaces: Minimize placement near glass, tiles, or other reflective materials to reduce unwanted echo or reverb.

Step 6: Unpacking

1. Carefully remove the speaker and bracket from the packaging.
2. Inspect all components for damage before proceeding.
3. Dispose of the packaging materials according to regulations.

Step 7: Mounting the Speaker

1. **Prepare the speaker cable** – Route the cable from behind and slightly below the RJ-45 connector (angled at 45°) for easier connection.
2. **Install the EasyMount bracket** – Mount in the designated wall location. Use the marked holes for either horizontal, vertical or corner installation.
3. **Attach the speaker** – Secure it to the EasyMount bracket using the supplied screws (3).
4. **Adjust and lock** – Set the desired angle and tighten the screws using the L-shaped Allen key that is supplied with the speaker.

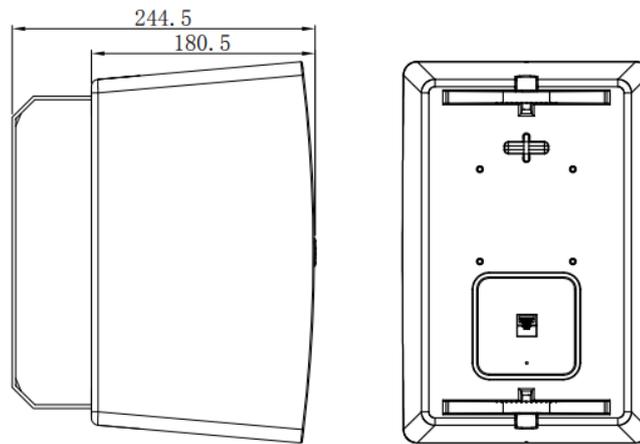

Step 8: Wiring the Speaker

Your speaker connects to a PoE/PoE+/PoE++ switch using a CAT cable for both network connectivity and power. Connect the CAT cable to the appropriate port on the switch and the RJ-45 connector on the speaker. Once connected, the LEDs on the RJ-45 connector will begin to blink, indicating an active connection.



Ensure the total power draw of all connected speakers stays within the PoE budget of the switch. Log in to the switch's management interface to confirm the available PoE capacity.

Step 9: Speaker setup

Your Dante speaker has a built-in DSP, mixer and amplifier. The speaker works out of the box without requiring any configuration. However, by using the **Kramer Speaker Manager** you can fine tune the configuration of the speaker (EQ, Low Pass Filter, High Pass Filter, Mixer and more).

The Dante speaker supports input from two channels and mixes them internally. By default, the speaker is configured to channel 1.

Please see this link for downloading the application (applicable for Windows only):

<https://kramer-speaker-manager.s3.us-east-1.amazonaws.com/updates/Kramer-Speaker-Manager-Setup.exe>




When launched with an active Internet connection, Kramer Speaker Manager automatically checks for updates and prompts you to install the latest version if available

Kramer Speaker Manager enables you to automatically discover Kramer PoE-powered Dante speakers and configure their DSP settings.

Ensure the following network settings are in place:

- **239.254.50.213:52123** – Multicast IP and port for speaker discovery
- **7000** – UDP port for device communication
- **22222** – Client port used by Kramer Speaker Manager
- Multicast traffic enabled in your network/switch configuration

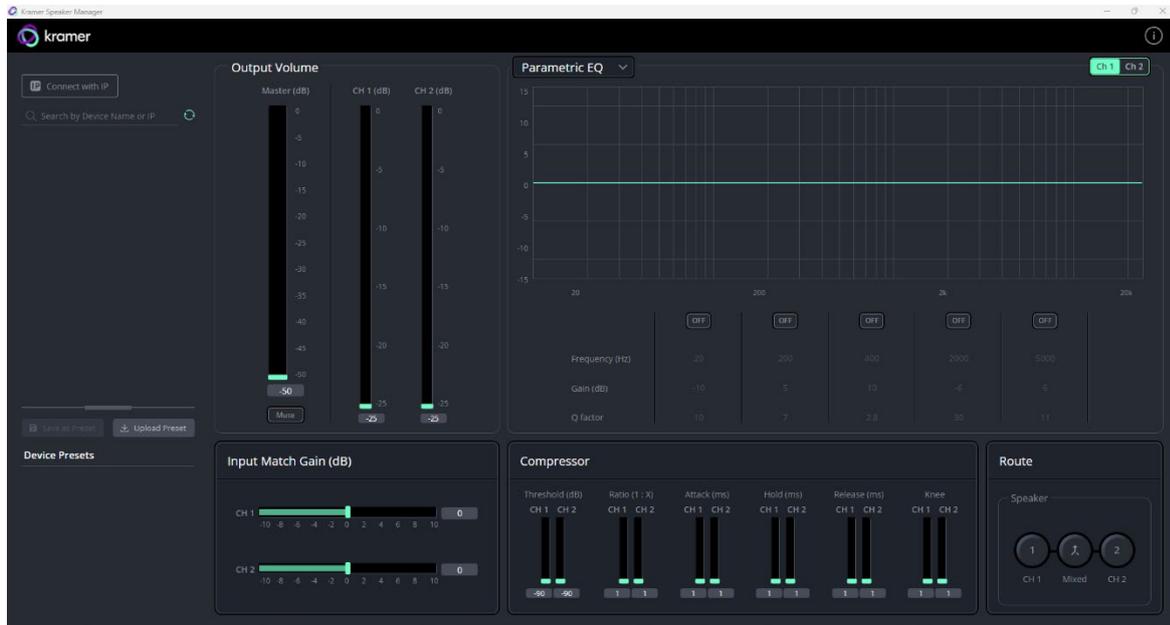

For detailed instructions on the Kramer Speaker Manager, please refer to the WM-6D user's manual.

Step 10: Connecting to Dante Network

To integrate your Dante-enabled speaker into a Dante audio-over-IP system, follow these basic connection steps:

Minimum Requirements

Before connecting, ensure the following:

- **Dante-compatible network switch** (Gigabit Ethernet recommended)
- **CAT5e or higher Ethernet cable**
- **Dante-enabled audio source or transmitter** (e.g., Dante audio interface, DSP, or mixing console)
- **Dante Controller software** installed on a PC/Mac (free download from Audinate:
<https://www.audinate.com/products/software/dante-controller>)

For **Dante Network requirements** refer to Audinate WEB site:

<https://www.getdante.com/support/faq/which-network-ports-does-dante-use/>

✔ Once connected and routed, audio will start streaming instantly with near-zero latency.

ℹ *Tip:* Rename the speaker in Dante Controller for easier system identification.

ℹ *Tip:* To find the speaker in the room, click the “**Find Me**” icon in Kramer Speaker Manager. The speaker will play a series of beeps to help you locate it.

