


Self-Hosted Management Software for Enterprise Environment Monitoring Systems

ENVIROMUX®

- Self-hosted software – ideal for users in industries that require local software management solutions for security or data privacy purposes.
 - Install on a Windows-based server or computer as a service or application.
 - ♦ Operating system requirements: Windows 7/8/10/11 32-bit or 64-bit, Windows Server 2008/2012/2016/2019/2022 32-bit or 64-bit.
 - ♦ Virtual machines are supported, including VMware.
 - One-time purchase – no monthly fees.
 - E-MNG-SH requires internet connection for auto license updates.
 - E-MNG-SHNR uses a non-renewing permanent license – does NOT require internet connection.
- Units may be monitored individually or in a group.
- Display values and status for individual sensors or list of sensors.
- Any computer, smartphone, and/or tablet with a web browser installed can be used to access the software.
 - Access is operating system independent through the HTML5 user interface on the computer/smartphone/tablet's web browser.
 - No clients or special apps to install.
- Supports 1,000 users accessing the software program at the same time.
 - Users can configure their own dashboards to display the data relevant to them and the window arrangement.
 - ♦ Customize dashboards to display unit status, sensor data, gauges, graphs, and IP camera snapshots.
- Configure pre-loaded geographical maps or upload custom floor plan maps/images for a visual representation of sensor locations.
 - Provides users with a real-time view of their facility, and the physical location and status of all connected ENVIROMUX environment monitoring systems and sensors.
- Schedule and customize PDF reports that can be viewed/saved in the software and emailed to selected users.
- Saves up to 1,000 user-programmable IP camera recordings.
 - Any programmed event can trigger a recording from an IP camera.
 - Recordings are created using snapshots captured based on the refresh rate set for the IP camera.
 - ♦ Recording duration can be set between 5 seconds and 10 minutes.
 - ♦ Each recording is labeled with the name of the camera the images are captured from with the date/time.
- Full HTTPS support with auto host-name update and certificate generation.
- Download sensor graph data and event logs.
- Automatically reloads the E-2D/5D/16D/MICRO/1W configuration when changes are made directly on an E-2D/5D/16D/MICRO/1W unit.
- NTI will provide customer, without charge, copies of any appropriate updates/enhancements for 12 months. This software update service is optionally extendable every twelve months for 20% of list price.
 - **Features coming soon in upcoming releases:**
 - ♦ Support for live stream video from IP cameras.
 - ♦ Auto discovery of NTI devices from server.
 - ♦ Email alerts from the software.
 - ♦ Support for offline activation of E-MNG-SHNR license.
 - ♦ Improvements to PDF reports.
 - ♦ Push notifications from browser on Android and iPhone smartphones/tablets.
 - ♦ Plot the placement of E-LLDC-xx Liquid Location Detection Sensor Cables on floor plan maps to visually see the specific location of liquid presence when detected.

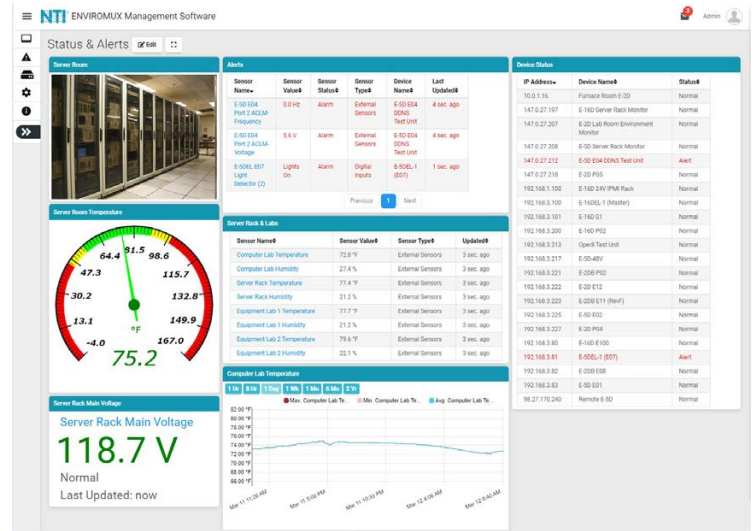

E-MNG-SH

Self-Hosted Enterprise Environment Monitoring System Management Software

- **Self-hosted software – install on a Windows-based server/computer.**
- **No clients or special apps to install.**
- **Access from anywhere using a web browser on a computer, smartphone, &/or tablet.**
- **Monitor & configure up to 3,000 units & all connected sensors.**
- **Display values and status for individual or list of sensors.**
- **Customizable monitoring and layout for each user.**
- **One-time purchase – no monthly fees.**

Optional Management Software for E-2D/5D/16D, E-MICRO-TRH(P), and/or E-1W(P).

E-MNG-SH is a self-hosted software program that provides an easy-to-use, unified interface for monitoring and configuring up to 3,000 E-2D/5D/16D/MICRO/1W units and all connected sensors (internal, external, digital input, and remote IP sensors (E-MICRO/1W)) and output relays via Ethernet. The software is installed on a Windows-based server or computer to actively poll all units for status information and alerts. Any computer, smartphone, or tablet with a web browser can be used to access the software. It allows users to be kept up to date on sensor statuses and be alerted instantly when a sensor goes out of range of a configurable threshold.