


F-8HD-1D-TVI-TX/RX

Quick Setup Guide

Step 1: Connect Power

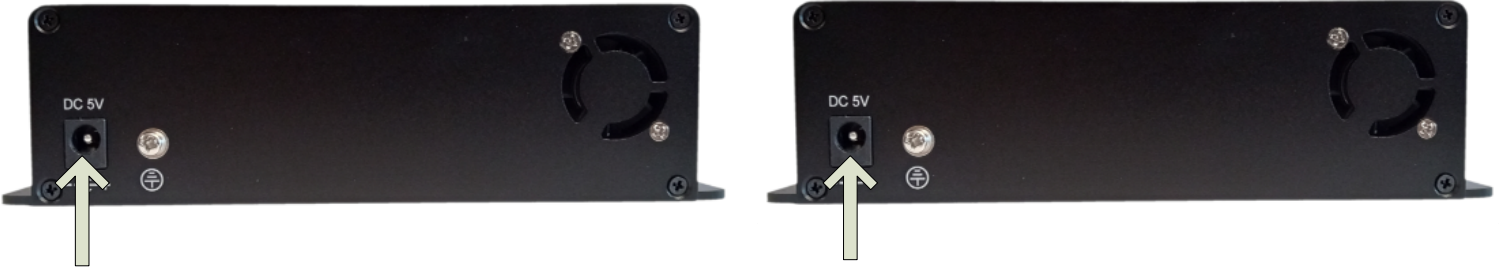

Connect Included Power Supplies to Transmitter (T) and Receiver (R)




“PWR” LEDs on both T and R indicate power is properly connected

Step 2: Connect Fiber

Connect Transmitter to Receiver using Single Mode Fiber (Not Included)

Distance up to 120km

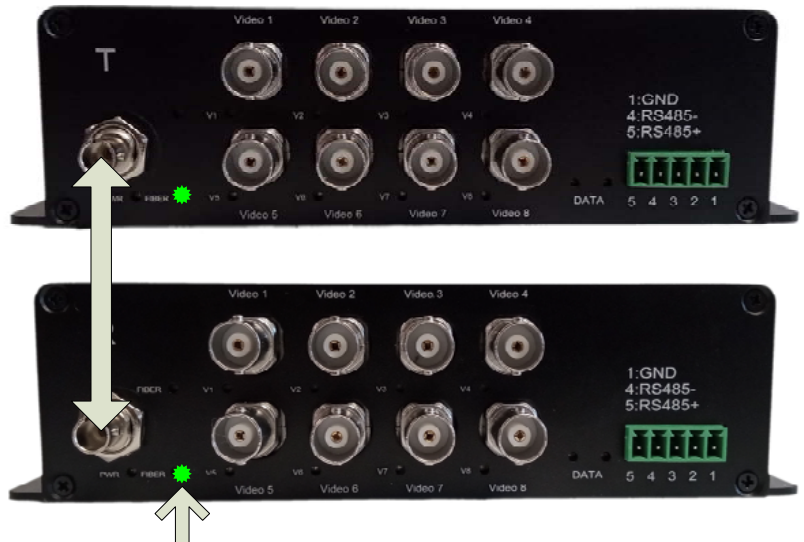

“FIBER” LEDs on both T and R indicate fiber is properly connected

Step 3: Connect Video

Connect video inputs to the Transmitter and outputs to the Receiver

IMPORTANT:

Transmitter Inputs
Video 1-8 correspond
to Receiver Outputs
Video 1-8



T Video 1 = R Video 1
T Video 2 = R Video 2
T Video 3 = R Video 3
T Video 4 = R Video 4
T Video 5 = R Video 5
T Video 6 = R Video 6
T Video 7 = R Video 7
T Video 8 = R Video 8

“V1-V8” LEDs on both T and R indicate video is properly connected

Step 4: RS Data Connection

Connect Controllers to the RS port on the Receiver, and devices to be controlled to the RS port on the Transmitter



“DATA” LEDs on both T and R indicate RS data is properly connected

PLEASE NOTE:

RS data connection
only applies to model
F-8HD-TVI-1D-TX/RX

Similar models such
as F-8HD-TVI-TX/RX
do not have this
feature.

Scan for more info:



F-8HD-1D-TVI-TX/RX

Quick Setup Guide



<https://thorbroadcast.com>

800-521-8467

sales@thorfiber.com