


# 4K 30 Hz 8x9 HDMI Matrix Switcher with Apps & WEB GUI

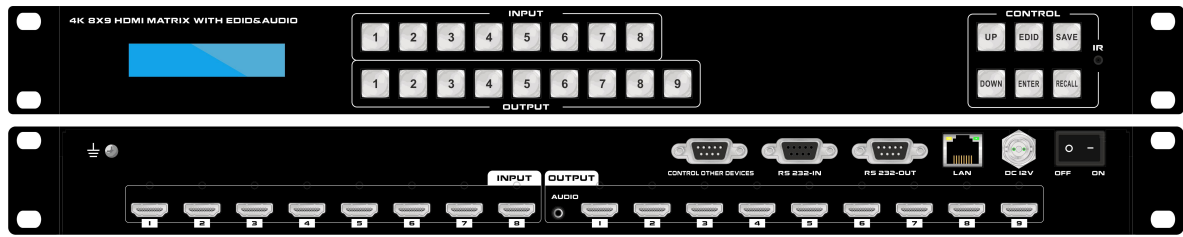

## Introduction

This is a new fixed 4K 30 Hz 8x9 HDMI Matrix Switcher with Apps & WEB GUI with 8 HDMI inputs and 9 HDMI outputs, the resolution can up to 4K30Hz and all ports are HDCP compliant. With the friendly user control methods by IR remote control, 2-Press push buttons with background blue light, WEB GUI, APP and RS232/UDP commands, this matrix switcher can work with the Blu-Ray Players, Set-Top boxes, Home Theater, and game consoles etc HDMI input sources to route to the HDMI displays, it has been widely used in different audio visual applications.


## Features

- 8 HDMI inputs and 9 HDMI outputs
- Support 1 audio(3.5mm) de-embedded
- Supports HDMI1.4, HDCP1.4
- The resolution can up to 4K@30Hz
- Deep Color support 48/36/30/24-bit
- Supports LPCM 7.1CH, Dolby TrueHD, Dolby Digital and DTS-HD Master Audio
- Supports IR remote control(IR remote control codes are available)
- Supports smart EDID management, including 8-output EDID, 15 internal EDID.
- Supports RS-232 and TCP/IP Control(WEB GUI, APP and IR remote)
- Supports 2-press push buttons control with blue lights
- Supports to rename the inputs and outputs, scenes

## Specification

<b>Name</b>	4K 30 Hz 8x9 HDMI Matrix Switcher with Apps & WEB GUI
<b>Resolutions</b>	480i, 576i, 480p, 576p, 720p, 1080i,
<b>Input ports</b>	8 * HDMI, 1* RS-232(control), 1 * RJ-45(control)
<b>Output ports</b>	9 * HDMI, 1* RS-232(control)
<b>ESD Protection</b>	±8kV (Air-gap discharge), ±4kV (Air-gap discharge)
<b>Controlling</b>	IR remote control, front buttons control, RS232, UDP
<b>Power</b>	DC:12V 2A
<b>Dimension(mm)</b>	440*150*44(mm)
<b>Weight</b>	2kg

## Connection diagram

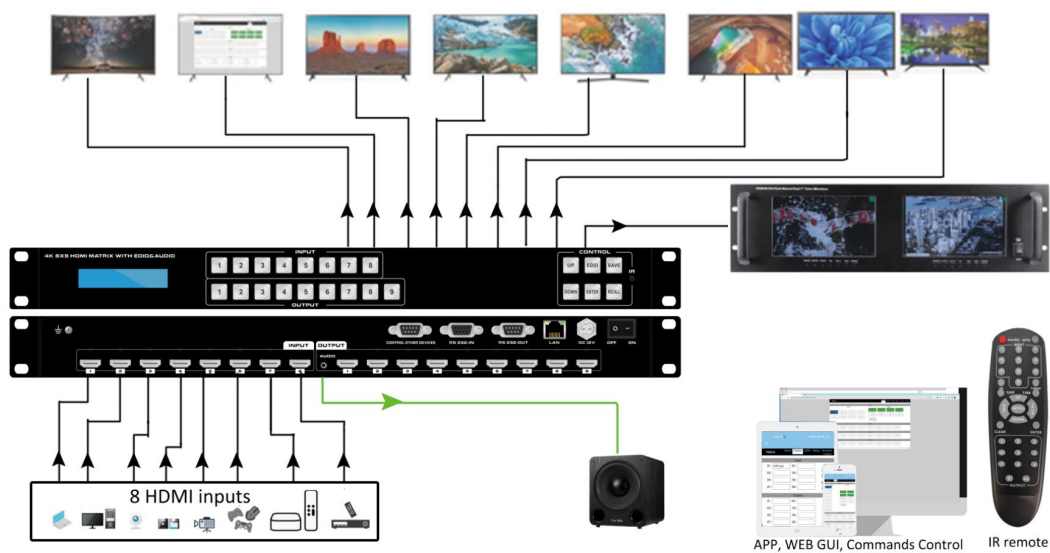

## Product Dimension

