

OMEGA™

4K / UHD

Scaler for HDMI and HDBaseT™



Version Information

Version	Release Date	Notes
5	Jun 2025	Firmware 1.5.1 • Updated to HDBaseT version 7.5.21. • Added support for the AT-OCS-900. • Introduced the option to toggle HDMI +5V on the HDMI output. • Added EDID support for 21:9 aspect ratio displays. Refer to the release notes for a complete list of updates, fixes, and known issues.

Sales, Marketing, and Customer Support

Main Office

Atlona Incorporated
1234 Lakeshore Dr Ste. 150
Coppell, TX 75019
United States

Office: +1.408.962.0515

Sales and Customer Service Hours
Monday - Friday: 8:00 a.m. - 6:30 p.m. (MST)

<https://atlona.com/>

International

+41 43 508 4321 (EMEA)
+65 6305 7575 (APAC)

Sales and Customer Service Hours
Monday - Friday: 09:00 - 17:00 (UTC +1)

Operating Notes



IMPORTANT: Visit <https://atlona.com/product/AT-OME-RX31> for the latest firmware updates and User Manual.

Warranty



To view the product warranty, use the following link or QR code:

<https://atlona.com/warranty/>.

Safety and Certification



CAUTION: TO REDUCE THE RISK OF
ELECTRIC SHOCK
DO NOT OPEN ENCLOSURE OR EXPOSE
TO RAIN OR MOISTURE.
NO USER-SERVICEABLE PARTS
INSIDE REFER SERVICING TO
QUALIFIED SERVICE PERSONNEL.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance instructions in the literature accompanying the product.



The information bubble is intended to alert the user to helpful or optional operational instructions in the literature accompanying the product.

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this product near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install or place this product near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of a polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the product.
11. Only use attachments/accessories specified by Atlona.
12. To reduce the risk of electric shock and/or damage to this product, never handle or touch this unit or power cord if your hands are wet or damp. Do not expose this product to rain or moisture.
13. Unplug this product during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the product has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the product, the product has been exposed to rain or moisture, does not operate normally, or has been dropped.



FCC Compliance

FCC Compliance and Advisory Statement: This hardware device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed or used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: 1) reorient or relocate the receiving antenna; 2) increase the separation between the equipment and the receiver; 3) connect the equipment to an outlet on a circuit different from that to which the receiver is connected; 4) consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Where shielded interface cables have been provided with the product or specified additional components or accessories elsewhere defined to be used with the installation of the product, they must be used in order to ensure compliance with FCC regulations.

Copyright, Trademark, and Registration

© 2025 Atlona Inc. All rights reserved. "Atlona" and the Atlona logo are registered trademarks of Atlona Inc. Pricing, specifications and availability subject to change without notice. Actual products, product images, and online product images may vary from images shown here.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation.

For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS, Inc. DTS, the Symbol, DTS and the Symbol together, and Digital Surround are registered trademarks and/or trademarks of DTS, Inc. in the United States and/or other countries. © DTS, Inc. All Rights Reserved.

All other trademark(s), copyright(s), and registered technologies mentioned in this document are the properties of their respective owner(s).

Table of Contents

Introduction	6
Features	6
Package Contents	6
Panel Description	7
Installation	8
Captive Screw Connections	8
Mounting Instructions	10
Connection Instructions	11
IP Modes	12
Connection Diagram	12
WebGUI	13
Video Settings	14
Audio	16
Display	17
RS-232	19
EDID	20
Time	21
Config	22
System	23
HDBT	25
Appendix	26
Integration with the AT-OCS-900N	26
Specifications	28

Introduction

The Atlona AT-OME-RX31 is an HDBaseT receiver, three-input switcher, and 4K/UHD scaler with a local HDMI input. Part of the Omega™ Series of integration products for modern AV communications and collaboration, the OME-RX31 features two HDBaseT inputs for receiving video up to 4K/60 4:2:0, plus embedded audio, control, and Ethernet over distances up to 330 feet (100 meters). The HDMI input supports video up to UHD/60 4:4:4. The OME-RX31 is HDCP 2.2 compliant and features 4K/60 upscaling and downscaling with frame rate conversion. Additionally, it provides integrated control for displays and room functions such as motorized screens, and can be externally triggered with the addition of an occupancy sensor. The OME-RX31 is ideal for 4K presentation applications with Omega or UHD-EX Series transmitters, as well as Atlona AV presentation switchers with HDBaseT outputs, local HDMI sources, and the Gain™ Series amplifiers.


Features

- Dual HDBaseT receiver with local HDMI input
- Video, audio, power, and control over category cable utilizing HDBaseT technology
- 4K/UHD downscaling and upscaling
- Automatic input selection and automatic display control
- Audio de-embedding
- Dual Ethernet ports
- Contact closure for screen or display lift control
- Trigger I/O ports for occupancy sensing

Package Contents

1 x AT-OME-RX31
2 x Mounting brackets
4 x Mounting screws
2 x 5-pin captive screw connector
1 x 4-pin captive screw connector
1 x 3-pin captive screw connector
1 x 24 V DC power supply
1 x Installation Guide

Panel Description

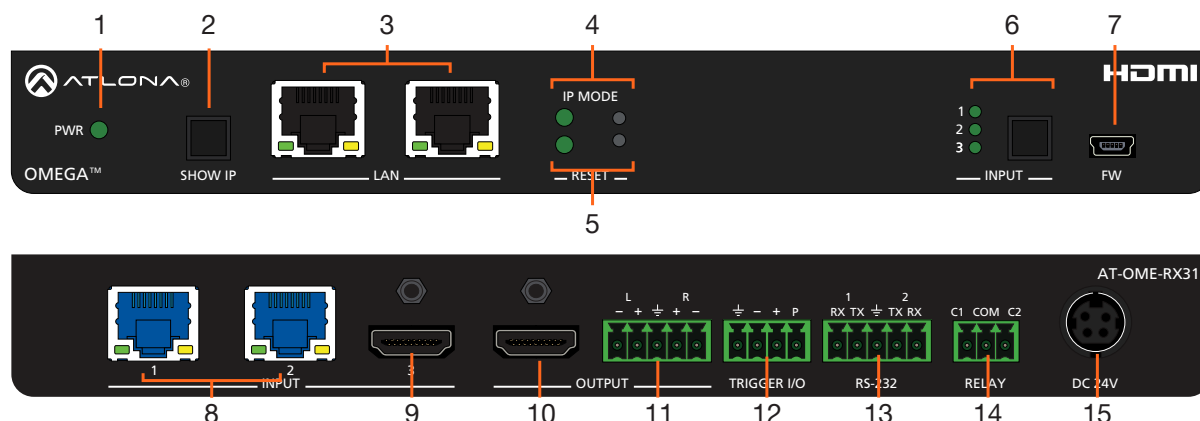

- 1 PWR LED**
Illuminates green when receiving power.
- 2 SHOW IP button**
Press and release this button to display the IP address of the AT-OME-RX31 on the connected display.
- 3 LAN**
Connect Ethernet cables to these ports to control the unit and/or to pass Ethernet to a local device.
- 4 IP MODE button and LED**
Press and hold the button for 5 seconds until the LED blinks to switch the IP mode between DHCP and Static IP modes. The LED will blink 2 times for DHCP and 3 times for static IP.
- 5 RESET button and LED**
Press and hold the button for 5 seconds until the unit resets. The LED will blink as the unit resets to factory default settings.
- 6 INPUT button and LEDs**
Press and release this button to cycle through each of the three inputs. A solid green LED indicator will display the currently active input. Each LED indicator corresponds to a numbered input on the rear panel of the unit.
- 7 FW**
Connect to a computer using a mini USB to USB A cable (not included).
- 8 HDBaseT IN**
Connect up to two category cables (CAT-5e or better) from each of these ports to compatible HDBaseT transmitters.
- 9 HDMI IN**
Connect an HDMI cable from an HDMI source to this port.
- 10 HDMI OUT**
Connect an HDMI cable from here to an HDMI display.
- 11 AUDIO OUT**
Connect to an audio DSP, amplifier, or other audio distribution devices.
- 12 TRIGGER I/O**
Connect a voltage-controlled device to this port.
- 13 RS-232**
Connect the included 5-pin captive screw to this port to provide RS-232 control for the AT-OME-RX31 and the connected display.
- 14 RELAY**
Connect the included 3-pin captive screw block to this port. This port provides a port, which allows the control of screens, curtains, and other devices. Use a 48 V DC relay with no more than 1 A current draw.
- 15 DC 24V**
Connect the included DC 24V power supply to this port.




Installation

Captive Screw Connections

RS-232

A 5-pin captive screw connector has been included for RS-232. The ground pin is shared between port 1 and port 2.



i NOTE: Port 1 will control the display and port 2 is for unit control.



Pin out will be determined by the RS-232 cable and connect as RX (receive), TX (transmit) and $\perp$ (Ground). Ground will be shared between port 1 and port 2.

Audio



Connect to an audio DSP, amplifier, or other audio distribution devices.

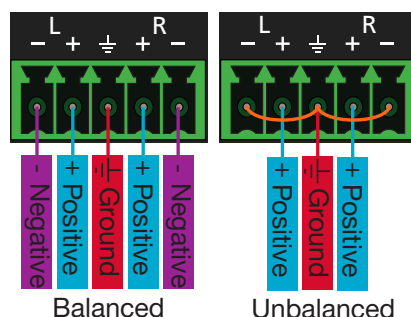

Use a jumper between the negative and ground pins when using an unbalanced connection.


Relay

A dual low-voltage signal relay is built into the OME-RX31 for control of devices such as electric screens and display lifts. A 3-pin captive screw connector has been included for connection.



There are 3 connections for the relay: C1, COM, and C2 (Circuit 1, Common, and Circuit 2.)



When using a dual signal relay with an electric projection screen, it allows for two different circuits to be controlled: up and down (pictured to the right).

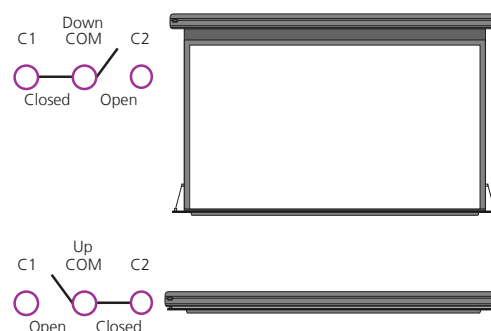

The relay will default to follow the display. When the unit turns on the relay will close C1 and open C2. When the display is turned off and signal is no longer being received C1 will open and C2 will close.


Trigger I/O

The **TRIGGER I/O** port allows voltage-controlled devices, such as an occupancy sensor, to be connected to the AT-OME-RX31. Use the included 4-pin captive screw connector to connect the device. Voltage range is 3 to 30 V DC.




There are 4 connections for the trigger: GND, -, +, and P (Ground, Negative, Positive, and Power).

Powered sensor

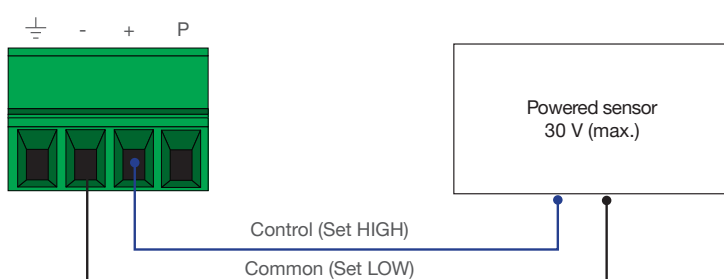

Passive sensor

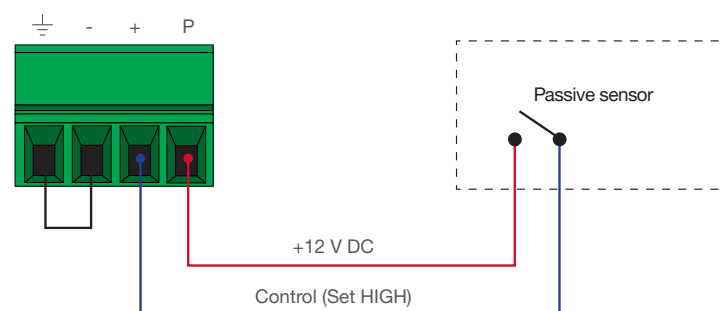

Mounting Instructions

The AT-OME-RX31 includes two mounting brackets and four mounting screws, which can be used to attach the units to any flat surface.

1. Remove the top 2 case screws on the side of the unit.
2. Align the mounting brackets to the side of the units.
3. Use the previously removed case screws to secure the mounting bracket to the enclosure.
4. Repeat the steps for the other side of the unit.



5. Mount the unit using the oval-shaped holes, on each mounting bracket. If using a drywall surface, a #6 drywall screw is recommended.



NOTE: Mounting brackets can also be inverted to mount the unit under a table or other flat surface.



Cable Recommendation Guidelines

Refer to the tables below for recommended cabling when using Altona products with HDBaseT. The green bars indicate the signal quality when using each type of cable. Higher-quality signals are represented by more bars.


Core	Shielding	CAT5e	CAT6	CAT6a	CAT7
Solid	UTP (unshielded)	■	■■■	■■■■	N/A
	STP (shielded)	■■■	■■■■■	■■■■■■	■■■■■■■
Performance Rating (MHz)		350	500	600	800



IMPORTANT: Stranded or patch cables are not recommended due to performance issues.

Cable	Max. Distance @ 4K	Max. Distance @ 1080p
CAT5e	295 feet (90 meters)	330 feet (100 meters)
CAT6 / CAT6a / CAT7	330 feet (100 meters)	330 feet (100 meters)

Use of a TIA/EIA 568B termination is recommended for optimal performance.



Connection Instructions

1. Connect an Ethernet cable from one of the **LAN** ports to the Local Area Network. Connect another Ethernet cable from one of the **LAN** ports to a display device, allowing IP control.
2. Connect two category cables (CAT-5e or better) from compatible HDBaseT transmitters to the **INPUT 1** and **INPUT 2** ports.
3. Connect an HDMI cable from **INPUT 3** to a UHD/HD source device.
4. Connect an HDMI cable from the HDMI **OUTPUT** port to a display device.
5. OPTIONAL: Connect an audio output device to this port using the included captive screw block.
6. OPTIONAL: Connect a voltage-controlled device, such as an occupancy sensor, to the **TRIGGER I/O** port.
7. OPTIONAL: Connect a serial cable from **RS-232 1** port to a display device.
8. OPTIONAL: Connect a serial cable from **RS-232 2** port to a control system, to control the AT-OME-RX31 remotely.
9. OPTIONAL: Connect an the **RELAY** port to the motor control for screens, curtains, and other devices. Use a 48 V DC relay with no more than 1 A current draw.
10. Connect the included 24 V DC power supply from this receptacle to an available AC outlet.


IP Modes

By default, the AT-OME-RX31 is set to DHCP mode. In this mode, when the AT-OME-RX31 is connected to the Local Area Network (LAN), it will automatically be assigned an IP address by the DHCP server (if available). Press the DEVICE IP button to show the IP address in the top left corner of the display.

If no DHCP server is available, or a static IP is required, the OME-RX31 can be set to static IP mode using the IP mode button.

- Press and hold the **IP MODE** button for 5 seconds to switch to static IP mode, the LED will blink 2 times when it goes into Static IP mode. In this mode, the AT-OME-RX31 will be set to the following:
IP address: 192.168.1.254
Subnet mask: 255.255.0.0
Gateway: 192.168.1.1
- To switch back to DHCP, press and hold the IP mode button for 5 seconds. The LED will blink 4 times when successfully put into DHCP mode.

Connection Diagram

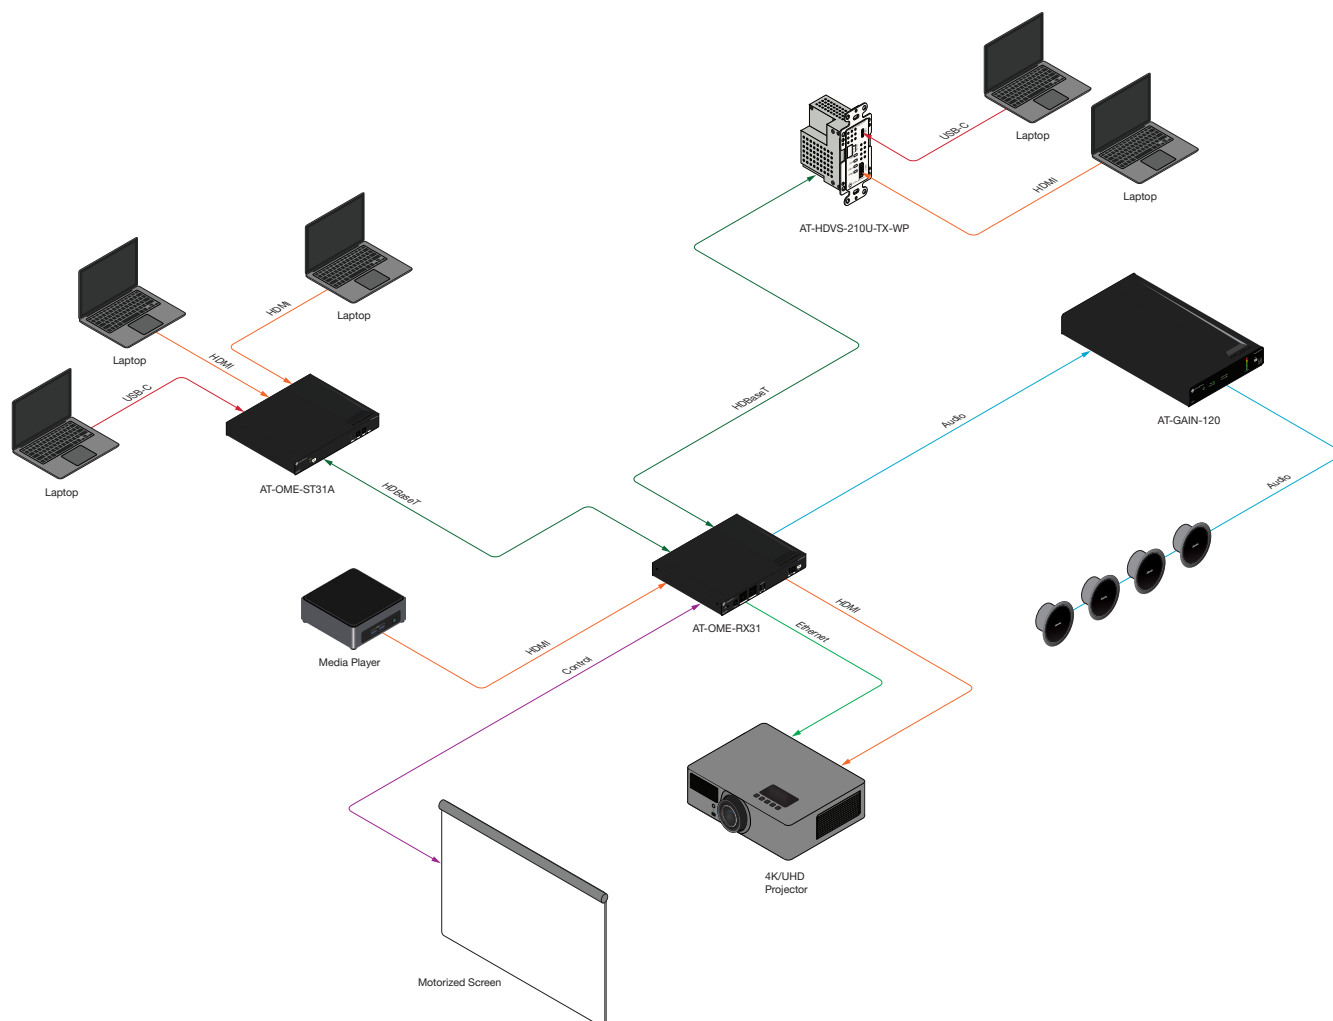

WebGUI

The AT-OME-RX31 includes a built-in webGUI, which allows easy remote management and control of all features. Follow the instructions below to access the webGUI.

1. Make sure that an Ethernet cable is connected between the **LAN** port on the AT-OME-RX31 and the network.
2. Press the **DEVICE IP** button on the front panel to display the IP address of the unit in the top left corner of the connected display.
3. Launch a web browser and enter the IP address in the address bar.
4. The AT-OME-RX31 **Submit** page will be displayed.
5. Enter the following information on the **Login** page.

Login: admin

Password: Atlona

AT-OME-RX31 Login

Login

Username
Password

6. Click the Login button. The info page will display, giving all the general information of the AT-OME-RX31.

AT-OME-RX31 Info

Info Video Audio Display RS-232 EDID Time Config System Logout HDBT

Info

Model Name : AT-OME-RX31
Software Version : 1.5.1
VALENS Version : 7.5.21
On-Time(d-h:m:s) : 1-1:19:32
Active Input : HDMI
Video Format : ---
TX 1 Type : Unknown
TX 2 Type : Unknown

Video Settings

Select Video from the top navigation to adjust routing and video settings.

AT-OME-RX31 Video

InfoVideoAudioDisplayRS-232EDIDTimeConfigSystemlogoutHDBT

Input

HDCP Settings

HDBaseT 1
☐ ON

HDBaseT 2
☐ ON

HDMI
☐ ON

Auto Switch

Auto Switch mode
☐ ON

Output

Input Selection

HDMI

Scaler

OFF

HDMI Output +5V

Always On

HDCP Settings

On - Sets the HDCP of the HDMI or HDBaseT ports to auto, allowing HDCP to switch between compliant and non-compliant according to the source and display HDCP handshake status.

Off - Sets the HDBaseT or HDMI port to HDCP non-compliant. No HDCP compliant source signals will pass in this mode.



NOTE: Some sources flag all content as protected, by selecting HDCP off the source device may send only user created content. In some cases, the source must be configured to send content to non-HDCP devices (e.g. HDCP must be turned off within a PS4's settings to pass unprotected content).

Auto Switch

Auto Switch mode - Set switching to auto (on) to have the source change when detecting new signal or the currently selected source is no longer sending signal.

HDMI Output +5V

Sets the +5V pin on the HDMI connector to the desired setting.

Always on - Forces the +5V pin on the HDMI output to "high" (always on).

On When Signal Present - Allows the +5V pin on the HDMI output to toggle, based on the presence of an input video signal.

Input Selection

HDMI

Scaler

ON

Output Resolution

1920x1080p60 (Default)

Aspect Ratio

KEEP

Overscan

Enable

OFF

Horizontal Size

0 %

-

+

Vertical Size

0 %

-

+

Picture

Brightness

30

-

+

Contrast

30

-

+

Saturation

30

-

+

Hue

30

-

+

Sharpness

0

-

+

Reset Pictures

Reset all Picture

HDMI Output +5V

Always On

Output

Input Selection - Use the drop down menu to switch between A/V Mute (no signal), HDMI, HDBaseT 1, HDBaseT 2, Internal Pattern 1, Internal Pattern 2, and Internal Pattern 3 source signals.

Scaler - When enabled, will display extra options.

Output Resolution - Select the output resolution the source signal will be scaled to from the drop down menu.

Scaling options: 1024x768, 1280x768, 1280x800, 1360x768, 1600x1200, 1920x1200, 2048x1080, 1280x720p50, 1280x720p60, 1920x1080p24, 1920x1080p25, 1920x1080p50, 1920x1080p60 (default), 3840x2160p24, 3840x2160p25, 3840x2160p30, 3840x2160p50, 3840x2160p60, 4096x2160p24, 4096x2160p25, 4096x2160p30, 4096x2160p50, 4096x2160p60



NOTE: Based on the selection from the drop down menu, the scaler will adjust not only resolution but frame rate as well. All VESA resolutions will output at 60Hz when using the scaler.

Aspect Ratio - Select between Keep (which will keep the aspect ration of the source device) and Fill (which will adjust the picture to fill the display).


Overscan - Enable to be able to manually adjust the horizontal and vertical size of the source image. Default is 0 and can be adjust from 0% to 50%.

Brightness, Contrast, Saturation, Sharpness, Hue - Adjust the output's brightness, contrast, saturation, sharpness, and hue manually. Default is 0% and can be adjusted from 0% to 60%.

Reset all Picture - Press the Reset button to set all the video options back to factory defaults.

Audio

Select Audio from the top navigation to adjust volume, mute status, and EQ levels.

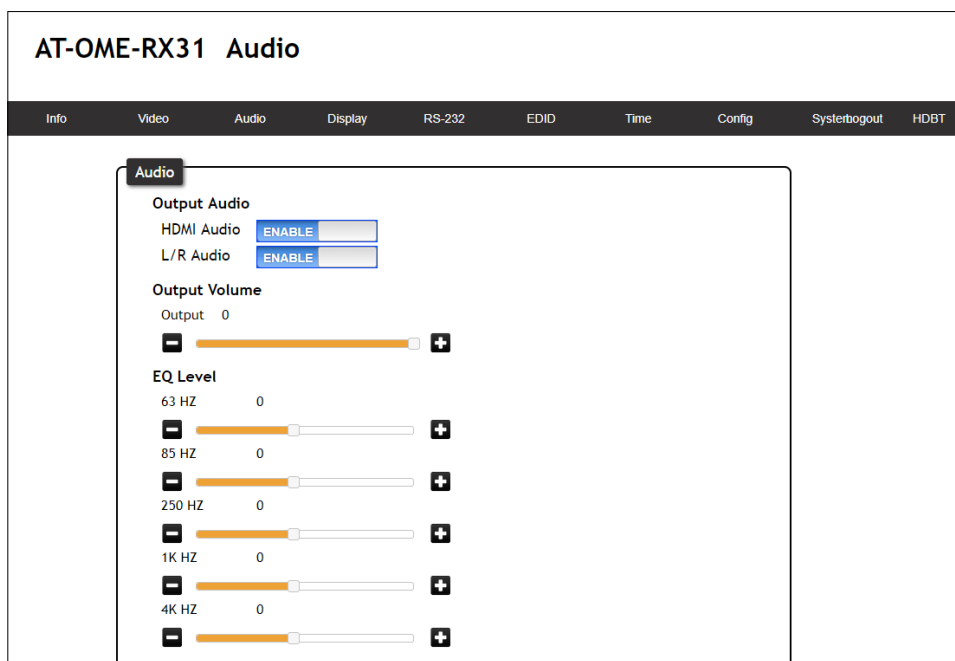

Output Audio

HDMI / L/R Enable - Unmutes the audio output signal, allowing audio to pass through the outputs.

HDMI / L/R Disable - Mutes the audio output signal of the ports. No audio will pass when selected.



NOTE: HDMI muting will mute the audio embedded on the HDMI output and L/R muting will mute the audio on the analog audio output.

Output Volume

Volume bar - Adjusts the master volume output of the unit from -80 to 0. Default is 0.

EQ Level

Level Sliders - Use the slider to adjust between level -12 and 15 on each band. Default is 0.

Display

Select Display from the top navigation to adjust display control settings.

AT-OME-RX31 Display

Info Video Audio Display RS-232 EDID Time Config Systemlogout HDBT

Display Control Guidelines:

Display control should always reside on the RX31 if connected to a Display. Please ensure display control is disabled on any other connected Atlona devices in order to ensure smooth operations.

CEC

CEC Command
 Power
 Volume

System Settings

Display Auto Power
Auto power off timer
Lamp cool down timer
Display Warm-Up Timer
Control Type

Occupancy Sensor Control

IP Address:
Port:

CEC

Command: Power - Press to send the CEC power on or off command out through the HDMI port.

Command: Volume - Press to send the CEC Volume up, down, or mute commands through the HDMI port.

System Settings

Display Auto Power - Set this toggle to ENABLED to allow the AT-OME-RX31 to send the power-on command to the display when an A/V signal is detected. When the AV signal is no longer present, the AT-OME-RX31 will send the power-off command to the display. If this functionality is not desired, then set to DISABLED. This feature is set to DISABLED by default.

Auto Power Off Timer - Sets the time interval before the command to power-off the display is sent, when an A/V signal is no longer present.

Lamp cool down timer - Sets the time between when the display is turned off and when the next command can be sent to the display.

Display Warm-Up Timer - Sets the amount of time between when the display is turned on to when the unit sends any commands to the display.

Control Type - Sets the control protocol for the connected display. Click this drop-down to select the control type. Available settings are CEC, IP, and RS-232. By default, CEC is selected for control of the display. IP and RS-232 can also be selected. When IP or RS-232 are selected, more fields are available.

Occupancy Sensor Control

IP Address - Enter the IP address of the AT-OCS-900N in this field.

Port - The port number used to communicate with the AT-OCS-900N.

Add - Click this button to add the AT-OCS-900N to the AT-OME-RX31. Up to three occupancy sensors are supported.

TCP/IP Settings of Controlled Device

IP Mode

Non-Login ▼

IP Address

10.20.50.35

Port

23

Username

admin

Password

•••••

Save

TCP/IP Settings of Controlled Device (only available when IP is selected)

IP Mode - Toggle telnet login mode between Non-Login and Login. If set to Login, a username and password will be required to control the controlled device via TCP/IP.

IP Address - Sets to the IP of the controlled device/display.

Port - Set the port of the controlled device for control. Default is 23.

Username & Password - Sets the username and password that is required when login mode is enabled.

RS232/IP commands

Manufacturer

Generic ▼

Products

Generic ▼

Model

Generic ▼

Display Commands

[Please use \x as a delimiter for HEX values]

Repeat Command

Status

DISABLED

Times

2 ▼

ON

PW 1

Send

OFF

PW 0

Send

Volume+

VOL+

Send

Volume-

VOL-

Send

Mute

MUTE

Send

Mute On

MUTE ON

Send

Mute Off

MUTE OFF

Send

Save

Revert

RS232/IP commands

Manufacturer

Generic ▼

Products

Generic ▼

Model

Acer
Barco
Benq
Canon
Casio
Eiki
Epson
Hitachi
Infocus
Lg
Nec
Optoma
Panasonic
Pjlink
Planar
Qomo
Samsung
Sharp
Sony
MUTE OFF

RS232/IP commands

Manufacturer

Panasonic ▼

Products

Panasonic Projector ▼

Model

Panasonic Projector
Panasonic TV
Panasonic TV (Copy)

[Please use \x as a delimiter for HEX values]

RS-232 / IP Commands

Manufacturer, Products, Models - Select the make and model of the display for control. Commands have been programmed into the unit for a wide range of products. If the current display is not found within the database, use generic and manually adjust the command fields.

Repeat Command - Enable Status to repeat the commands. Default repeat number is 2 and can be adjusted from 2 to 4 times.

Commands: On/Off/Volume/Mute - These fields will automatically be filled with the correct command when selecting a manufacturer and product from the drop down menus. If manually entering the commands, type them into the fields next to the command name.

Send - Use this button to send the command to the display, this can be used while manually typing the commands to ensure the commands are correct.

Save - Save the commands to the webGUI. Manufacturer, products, and Model will revert to Generic but the commands will be saved from the previously selected and saved Manufacturer, products, and model selection.

Revert - Sets the commands back to the previously saved settings.

RS-232

Select RS-232 from the top navigation to adjust the zone control parameters for the RS-232 port.

AT-OME-RX31 RS-232

Info Video Audio Display **RS-232** EDID Time Config Systemlogout HDBT

RS-232

RS-232 Parameter Setting

RS232 1(Display)

Baud rate 9600
 Data bit 8
 Parity None
 Stop bit 1
 Save

RS232 2(Console)

Baud rate 115200
 Data bit 8
 Parity None
 Stop bit 1
 Save

HDBaseT input 1 This port is used to send raw RS232 commands to OME-TX-x source via RS232.

Baud rate 115200
 Data bit 8
 Parity None
 Stop bit 1
 Save

HDBaseT input 2 This port is used to send raw RS232 commands to OME-TX-x source via RS232.

Baud rate 115200
 Data bit 8
 Parity None
 Stop bit 1
 Save

RS-232 Parameter Setting

RX RS232 1 (Display) - These port settings are for controlling the display. Defaults are 9600, 8, None, and 1.

RX RS232 2 (Console) - These port settings are for local control by a third-party control system. Defaults are 115200, 8, None, and 1.

HDBaseT input 1 - Select the baud rate, data bit, parity, and stop bit to match the transmitter's parameters. Defaults are 115200, 8, None, and 1. These settings will be disabled if connected to an Atlona transmitter.

HDBaseT input 2 - Select the baud rate, data bit, parity, and stop bit to match the transmitter's parameters. Defaults are 115200, 8, None, and 1. These settings will be disabled if connected to an Atlona transmitter.

EDID

Select EDID from the top navigation to save/load EDIDs.

AT-OME-RX31 EDID

Info Video Audio Display RS-232 **EDID** Time Config Systerbogout HDBT

EDID Settings

HDBaseT1 Connected Displays(default)

HDBaseT2 Connected Displays(default)

HDMI Connected Displays(default)

EDID Saved

MEM 1:

save from

Output 1

Save

EDID Settings

HDBaseT1 Connected Displays(default)

HDBaseT2 Connected Displays(default)

HDMI

MEM_1
 1080p/2ch
 1280x800/2ch
 1920x1200/2ch
 3840x2160/2ch

EDID Saved

MEM 1:
 3840x2160/2ch

EDID

EDID Settings - Use the drop down menu to select from default (highest common resolution between source and display), 4 internal EDIDs, and 1 previously saved EDID.

EDID Saved - The ID field will display the memory # and currently saved EDID name, select output 1 from the drop down menu. Once output 1 is selected, press the save button to make it available in the EDID settings drop down menus.

Time

Select Time from the top navigation to select the time server for the unit to sync to.

AT-OME-RX31 Time

Info
 Video
 Audio
 Display
 RS-232
 EDID
 Time
 Config
 Systerbogout
 HDBT

Time

SNTP Configuration

GMT
 (GMT-08:00) Pacific Time (US & Canada & Tijuana)

NTP Server
 pool.ntp.org
 Sync
 Save

Server Time
 Thu, 05 Mar 2020 09:08:06 GMT

Daylight Saving Time Configuration

ENABLE

Start Time
 March
 Second Week
 Sunday
 02 : 00

End Time
 November
 First Week
 Sunday
 02 : 00

Adjust Time
 01 : 00
 Save

SNTP Configuration

Server info - Select the time zone the unit will run in. If the unit has internet access, it can be set to sync to a server as well. Press the Sync button if using a server time or press the Save button if setting by timezone.


Daylight Savings Time Configuration

Enable/Disable slider - Default is disabled. Enable to have the unit automatically update with Daylight savings time.

Daylight Savings settings - Set the date and time to have the unit start and end Daylight Savings time and how much time the unit will adjust by.

Config

Select Config from the top navigation to update the admin password.

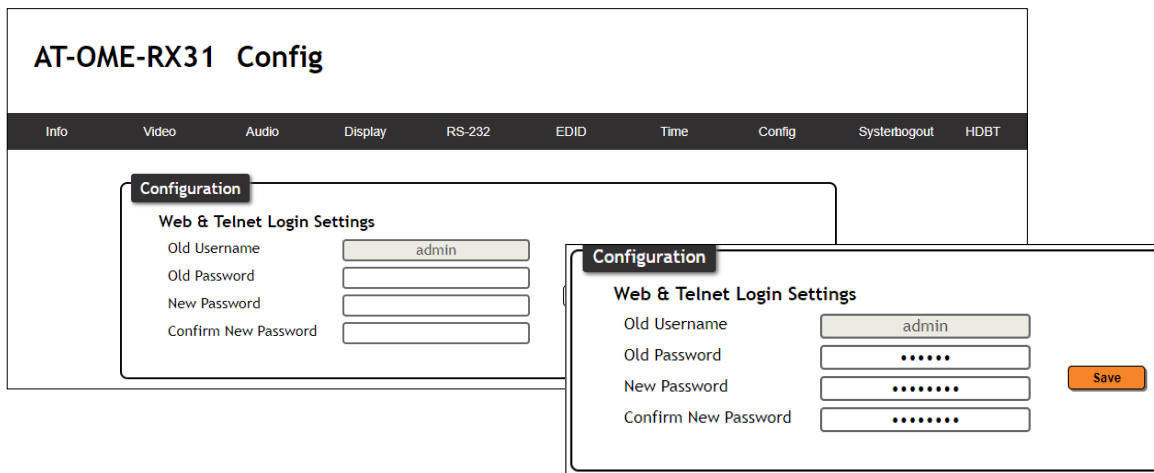

The screenshot shows the AT-OME-RX31 Config web interface. At the top, there is a navigation bar with tabs: Info, Video, Audio, Display, RS-232, EDID, Time, Config, Systemlogout, and HDBT. The 'Config' tab is selected. Below the navigation bar, there is a 'Configuration' section with a sub-section 'Web & Telnet Login Settings'. This section contains four input fields: 'Old Username' (pre-filled with 'admin'), 'Old Password', 'New Password', and 'Confirm New Password'. A 'Save' button is located to the right of the input fields.

Users


Admin Password - Update the admin password for the switcher. Only the admin password may be changed, the username will remain admin.

NOTE: The passwords cannot contain any special characters. e.g. !@#\$%^&*?\?+-;,'".

Once the new password has been entered, press the Save button to make the password live. The user will be logged out and must log back in with the new password.

System

Select System from the top navigation to adjust relay, network, or system options.

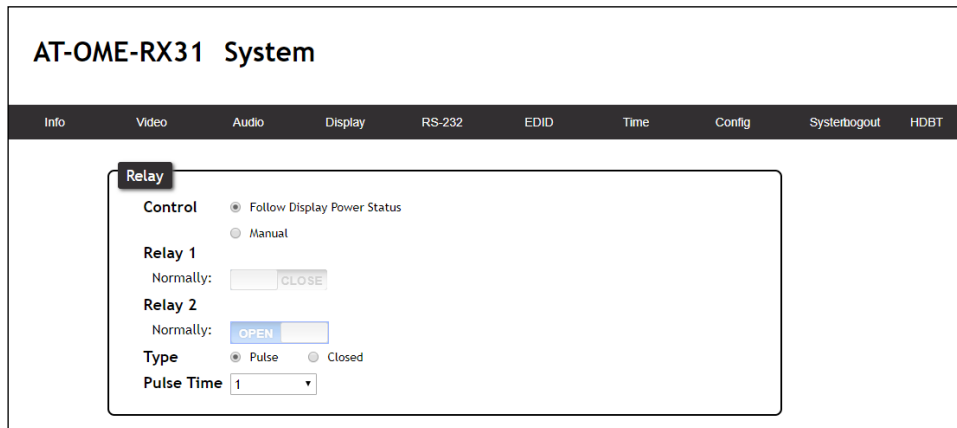

Relay

Control - Set the relay to either follow the display's status or be manually set using the selectors in the WebGUI. When the unit is set to pulse, the relay will latch for the designated pulse time before opening again. The relay that opens and closes will be determined by the power state:

Power On

Relay 1: Latch will close for designated pulse time then open.

Relay 2: Relay will remain open.

Power Off

Relay 1: Relay will remain open.


Relay 2: Latch will close for designated pulse time then open.

Relay - When the relay is set to manual, select the sliders to open and close the com ports.


Type - Switch between pulse and closed relay type.

Pulse Time - Sets the time between each pulse in seconds. Range is 1 to 30. Default is 1.

When using a dual signal relay with an electric projection screen, it allows for two different circuits to be controlled: up and down (pictured to the right).

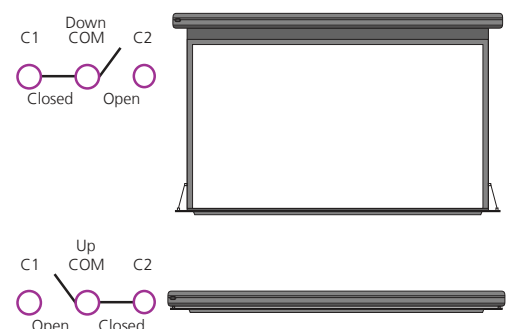

The relay will default to follow the display. When the unit turns on the relay will close C1 and open C2. When the display is turned off and signal is no longer being received C1 will open and C2 will close.

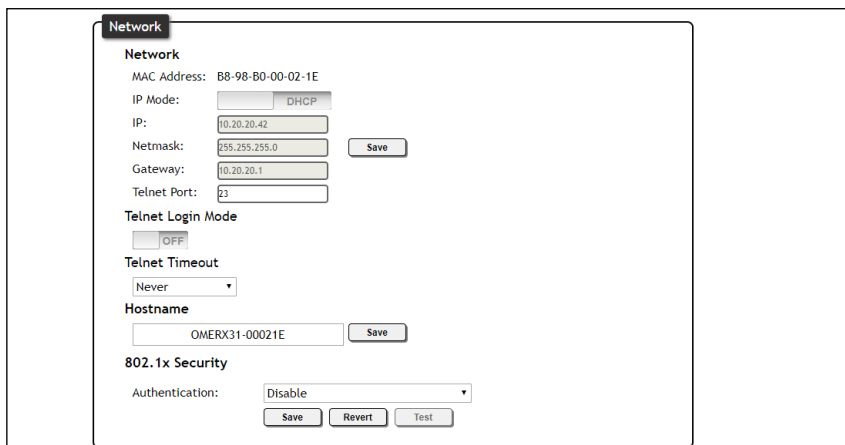

Network

MAC Address - Displays the MAC address of the unit.

IP Mode - Switch between static and DHCP IP modes.


IP, Netmask, Gateway - This will display the unit's current DHCP IP settings. When set to static, fill in the IP address, netmask, and gateway.

Telnet Port - Set the telnet port if needed for control. Default port is 23.

Telnet Login Mode - Toggle telnet login mode on and off. If on, a username and password will be required to control the unit via telnet.

Telnet Timeout - Set the amount of time between actions before the current user is logged out. Default is 10000 seconds.

Hostname - Set the name for the unit, this will show up in network discovery.

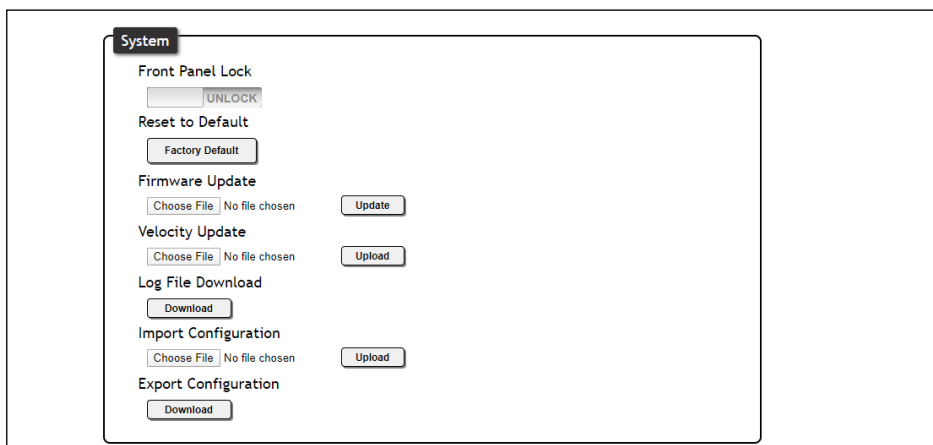

System

Front Panel Lock - Lock or unlock the front panel buttons.

Reset to Default- Press the Factory Default button to set the unit back to all factory settings, including IP mode.

Firmware update - Use the choose file button to search the local PC for the firmware file. Once selected, press the update button to start the firmware update.

i NOTE: Firmware updates and release notes can be found at <https://atlona.com/product/AT-OME-RX31/>.

Log File Download - Use the Download button to download the system log to a file. This file is used for troubleshooting purposes.

Import Configuration - Use the choose file button to upload a system configuration file to the unit.

Export Configuration - Use the download button to save the current system configuration to a file.

HDBT

Select HDBT to open the HDBaseT cable test page. This page will check extender versions, cable status and length, and Video Quality.

AT-OME-RX31 HDBT

Info
Video
Audio
Display
RS-232
EDID
Time
Config
Systemlogout
HDBT


HDBaseT Channel Cable Test

HDBaseT Zone Input 1

Start

TX Version	---	Test Instructions 1. Select HDBT Zone 2. Connect active HDMI source(DVD etc...) 3. Ensure source and sink are operating 4. Click the Start button Use highest source resolution without exceeding 4K@60Hz 4:2:0 - If the BER and Cable quality all pass, the system is functioning as expected. - If BER passes but one or more of the Cable pairs fail, the cable is compromised and may require retermination. - If BER and one or more of the Cable pairs fails, the cable should be reterminated. If this does not fix the issue, the cable may need to be replaced.
RX Version	---	
TMDS Clock	---	
Cable length (Estimated)	---	
Video Quality (Video BER)	---	
Cable Quality Pair A	---	
Cable Quality Pair B	---	
Cable Quality Pair C	---	
Cable Quality Pair D	---	

EIA568B RJ45 Pairing



T568B

HDBT Test

HDBaseT Zone - Use the drop down menu to select which HDBaseT input is being tested. Only active connections can be tested.

Start/Stop - Use the start/stop button to run or cancel the HDBaseT signal testing. The webGUI will remain active until the testing stops.

TX / RX Version - When the test starts, the chipset version will display. AT-OME-RX31 will be VS2310.

TMDS Clock - After the test has been initiated, it will display the TMDS clock frequency in Mhz.

Cable Length - An approximate HDBaseT cable length will be displayed here after the test has been started.

Video Quality (Video BER) - Will display pass or fail depending on if the cable video signal quality.

Cable Quality - Each pair will be tested and return a pass or fail status.

Failure:

One or more Pairs - Rerterminate the cable.

Of BER and any pairs - Replace the cable.

Of one or more pairs after retermination - Replace the cable.

Appendix

Integration with the AT-OCS-900N




NOTE: The AT-OME-RX31 supports a maximum of three AT-OCS-900N devices.

The following provides instructions on adding the AT-OCS-900N occupancy sensor as a device. The **Auto Switch mode** on the AT-OME-RX31 does not need to be enabled for this to work.



IMPORTANT: A username and password must be configured on the AT-OCS-900N before using the device with the AT-OME-RX31.

1. Connect the AT-OCS-900N to the same network as the AT-OME-RX31. Refer to the AT-OCS-900N User Manual for more information.
2. Login to the web server of the AT-OME-RX31.
3. Click **Display** in the top menu bar.
4. Under the **Occupancy Sensor Control** section, enter the IP address of the AT-OCS-900N in the **IP Address** field.

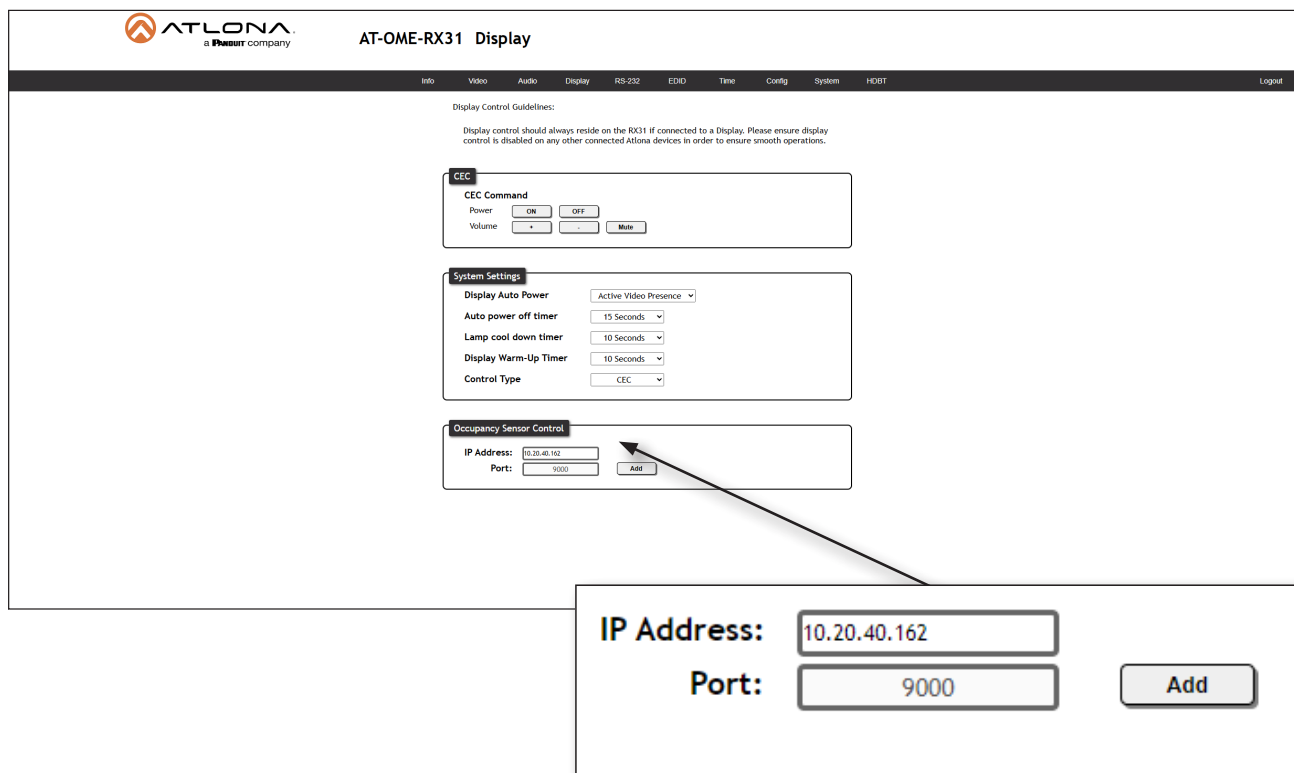

The screenshot shows the AT-OME-RX31 web interface. The top navigation bar includes 'Info', 'Video', 'Audio', 'Display', 'RS-232', 'EDID', 'Time', 'Config', 'System', 'HDMI', and 'Logout'. The 'Display' section is active, showing 'Display Control Guidelines' and three main configuration areas: 'CEC Command', 'System Settings', and 'Occupancy Sensor Control'. The 'Occupancy Sensor Control' section has an 'IP Address' field (10.20.40.162) and a 'Port' field (9000), with an 'Add' button. A callout box highlights these fields.

5. Click the **Add** button. If the correct IP address was entered and the AT-OCS-900N is found, additional information will be displayed under the Occupancy Sensor Control section, as shown on the next page.

IP Address:
Port:
[10.20.40.162](#)
Turn Display On on Occupancy
Turn Display Off on Vacancy

6. Click the **Turn Display On on Occupancy** toggle to enable or disable this feature. When enabled, the toggle switch will display as **ENABLED** and the occupancy sensor will power-on the display when the room is occupied.
7. Click the **Turn Display Off on Vacancy** toggle to enable or disable this feature. When enabled, the toggle will display as **ENABLED** and the occupancy sensor will power-off the display when the room is no longer occupied.
8. Click the **Identify** button to identify the occupancy sensor. This feature is useful when multiple sensors are connected.



IMPORTANT: When adding an occupancy sensor, it is recommended that a static IP address is assigned to the occupancy sensor. DHCP is not recommended.

9. Click the **Remove** button to delete a sensor from the **Sensors** list.
10. Setup is complete.

Specifications

Video		
HDMI	2.0	
HDCP	2.2	
UHD/HD/SD	4096x2160 @ 60 ⁽¹⁾ /50/30/25/24 Hz 3840x2160 @ 60 ⁽¹⁾ /50/30/25/24 Hz 1920x1080p @ 60/59.94/50/30/29.97/25/24/23.98 Hz 1920x1080i @ 30/29.97/25 Hz	1280x720p @ 60/59.94/50 Hz 720x576p @ 50 Hz 720x576i @ 50 Hz 640x480p @ 60/59.96 Hz 640x480i @ 30 Hz
VESA All resolutions are 60 Hz	2560x1600 2048x1536 1920x1200 1680x1050 1600x1200 1440x900 1400x1050 1280x1024	1280x800 1366x768 1360x768 1152x864 1024x768 800x600 640x480
VESA 21:9	2560x1080 @ 30 Hz 4:4:4 2560x1080 @ 60 Hz 4:4:4 3440x1440 @ 30 Hz 4:4:4	3440x1440 @ 50 Hz 4:4:4 3840x1600 @ 30 Hz 4:4:4
Scaler ⁽²⁾	1024x768 @ 60 Hz 1280x720 @ 50/60 Hz 1280x768 @ 60 Hz 1280x800 @ 60 Hz 1360x768 @ 60 Hz 1600x1200 @ 60 Hz	1920x1080 @ 24/25/50/60 Hz 1920x1200 @ 60 Hz 2048x1080 @ 60 Hz 3840x2160 (UHD) @ 24/25/30/50/60 Hz 4096x2160 (DCI) @ 24/25/30/50/60 Hz
Color Space	YUV, RGB	
Chroma Subsampling	4:4:4, 4:2:2, 4:2:0	
Color Depth	8-bit, 10-bit, 12-bit	
HDR ⁽²⁾	HDR10, Hybrid-Log Gamma (HLG), and Dolby® Vision™ @ 60Hz	

Audio			
HDMI Pass-Through Formats	LPCM 2.0 LPCM 5.1 LPCM 7.1	Dolby® Digital Dolby Digital Plus™ Dolby TrueHD Dolby Atmos®	DTS® Digital Surround™ DTS-HD Master Audio™ DTS:X®
Bit Rate	24 Mbps, max		
Analog Audio			
Format	2-channel stereo		
Balanced Output	+4 dBu, nominal gain; +20 dBu headroom		
Frequency Response	20 Hz to 20 kHz, ±0.5 dB		
THD + N	< 0.004% @ 20 Hz to 20 kHz		
SNR	> 104 dB @ 1 kHz, zero clipping @ 0 dBFS, unweighted		
Sample Rate	32 kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, 192 kHz		

Appendix

Control	
RS-232	Device control and configuration Supported baud rates: 2400, 4800, 9600, 19200, 38400, 57600, 115200
Trigger	Occupancy sensor triggering; wake from standby and/or display power-up when room becomes occupied. Electrical rating: 30 V @ 1 A (max.)
Relay	Contact closure control for room functions such as motorized screens and display lifts, as well as occupancy sensing and remote button controls. Normally Open (NO), adjustable Toggle and Pulse modes. Electrical rating: 48 V @ 1 A.
IP	Protocols: HTTPS, Telnet, mDNS Modes: DHCP, Static – selectable through front panel and built-in web server
CEC	Yes

Resolution / Distance	4K/UHD - Feet / Meters		1080p - Feet / Meters	
HDMI IN/OUT	16	5	30	10
CAT5e	295	90	330	100
CAT6/6a/7	330	100	330	100

Connectors, Controls, and Indicators	
HDMI IN	1 – Type A, 19-pin female
HDMI OUT	1 – Type A, 19-pin female
AUDIO OUT	1 – 5-pin captive screw, balanced / unbalanced 2-channel
TRIGGER I/O	1 – 4-pin captive screw
RS-232	1 – 5-pin captive screw
RELAY	1 – 3-pin captive screw
LAN	2 – RJ45, 100Base-T
HDBaseT	2 – RJ45
PWR	1 - 4-pin, DIN
Control Buttons: SHOW IP, INPUT IP MODE, RESET	2 – momentary, tact-type 2 – momentary, tact-type
Function Indicators: PWR, INPUT IP MODE, RESET	3 – LED, green 2 – LED, green

Temperature	Fahrenheit	Celsius
Operating	32 to 122	0 to 50
Storage Temperature	-4 to 140	-20 to 60
Operating Humidity (RH)	20% to 90%, non-condensing	

Power	
Consumption	8.1 W
BTU/h	26.7
External Power Supply	100 - 240 V AC, 50/60 Hz Output: 24 V / 2.7 A DC

Dimensions	Inches	Millimeters
Device (H x W x D)	1.02 x 8.62 x 5.98	26 x 219 x 152

Weight	Pounds	Kilograms
Device	2.15	0.975

Certification		
Device	CE, FCC	
Power Supply	CE, FCC, UL	

Compliance	
NDA-899	Yes

Warranty	
Device	To view the product warranty, use the following link: https://atlona.com/warranty

- (1) 4K/UHD p60 4:4:4 supported on input/output HDMI, 4K/UHD p60 4:2:0 is supported on HDBaseT.
 (2) HDR supported on HDMI only.